
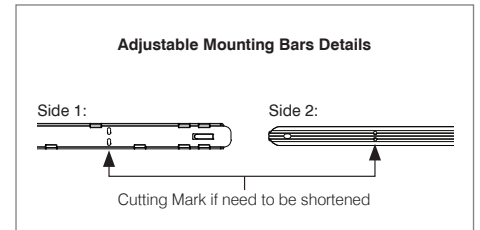
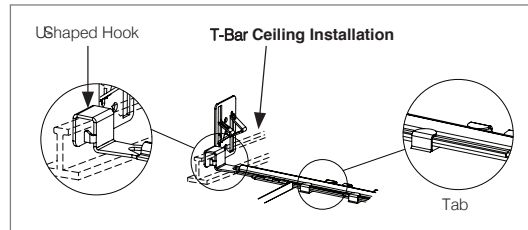




HALL LED™ PRO MINI

New Construction Mounting Plate Installation - INTEGRAL DRIVER 120/277V Dimming TRIAC / ELV - 0-10V


1. Locate position of mounting plate before installing the ceiling material. Fasten the mounting plate to the wood joist (or other ceiling type) with the adjustable mounting bars (10" (254 mm) to 24.5" (622 mm)). To shorten the bars to 10" (254 mm), remove bars and cut off at the notch (see adjustable mounting bars detail view).
2. Once the correct bar length is known, press tabs to lock the mounting bars to the plate or using pliers, tighten the U-shaped hooks on the T-bars.

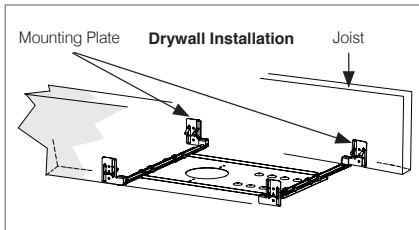

- 1 - INSTALL BX CABLES (BY OTHERS) IN THE CONNECTION BOX.
- 2 - MAKE ALL NECESSARY CONNECTIONS (SEE DIAGRAM). * DAISY CHAIN CONNECTIONS NOT POSSIBLE FOR 0-10V DIMMING.
- 3 - CONNECT THE FIXTURE TO THE LED DRIVER HOUSING USING THE QUICK CONNECTOR.
- 4 - STARTING WITH THE CONNECTION BOX, CAREFULLY INSERT THE ASSEMBLY THROUGH THE CUT-OUT.
- 5 - CLOSE FIXATION BRACKETS TO FIT INSIDE CUT-OUT.
- 6 - INSERT FIXTURE INTO THE CEILING. TO SECURE THE FIXTURE INSIDE THE HOUSING, SCREW THE FIXATION BRACKET ADJUSTMENT SCREW (2) WITH A DRILL OR SCREW DRIVER. FIXATION BRACKETS WILL OPEN AUTOMATICALLY WHILE SCREWING.

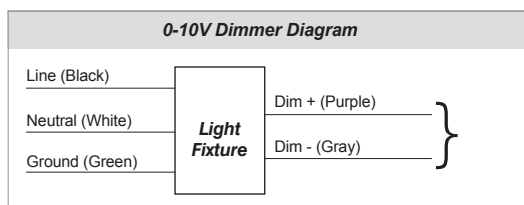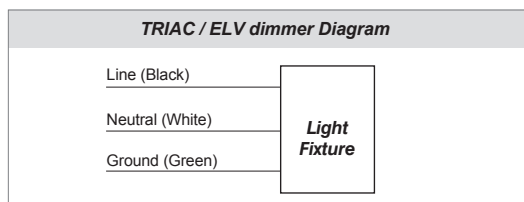

CONNECTION BOX



CONNECTION BOX

