


POL

Wall LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

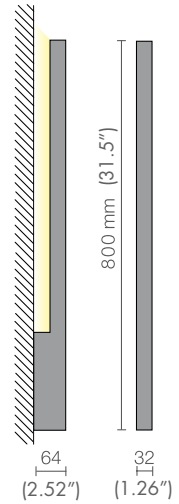

L259650.30 LED 15W 3000K 1600lm 500mA CRI>80 A++ 131/235

L259650.40 LED 15W 4000K 1700lm 500mA CRI>80 A++

SPECIFICATION SHEET Wall lamp for indirect lighting with high efficiency LED modules, in extruded aluminium anodised or with an epoxy powder coated stabilized with UV rays with a super pure 99.9% aluminium reflector and an opal coextruded polycarbonate screen. driver included. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

Bianco satinato RAL 9003
Frosted white RAL 9003

Anodizzato naturale
Natural anodised

Included: driver
Photobiological risk group U,
in compliance with Standard EN 62471,

VOLTAGE 120V 220V 277V