

BEEM™ 2

LED

TYPE:

PROJECT NAME:



| MODEL # | WATT | LED | OPTICS | FINISH | VOLTAGE |
|---------|------|-----|--------|--------|---------|
|---------|------|-----|--------|--------|---------|


DESCRIPTION:

Drive over outdoor mono and double emission radial recessed lighting in AISI 316L steel or aluminium. Thanks to its winning design, even common areas such as driveways take on a unique look. Provided wired with a 1.5 m neoprene cable.

INSTALLATION NOTE:


Must be wired in series when two or more are wired together with same driver.

SPOT LIGHT

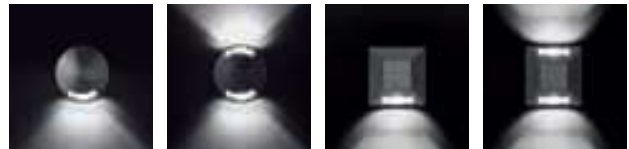


BEEM 2 Dimensions

L5CD20



WATTAGE

☐ 1W ☐ 2W

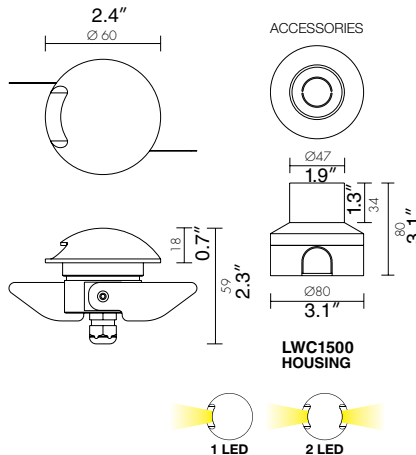

CE LED TEC III F IP67 500 Q45 senza cassaforma - without outer casing

LED COLORS

☐ 0. 5000K WHITE ☐ 5. 3000K WHITE
☐ 1. BLUE

FINISH

☐ I. STAINLESS STEEL
☐ G. ALUMINIUM
☐ H. ALUMINIUM BLACK

VOLTAGE ☐ 120V ☐ 220V ☐ 277V

OPTICS


☐ D. DIFFUSED BEAM

L5CD21



WATTAGE

☐ 1W ☐ 2W

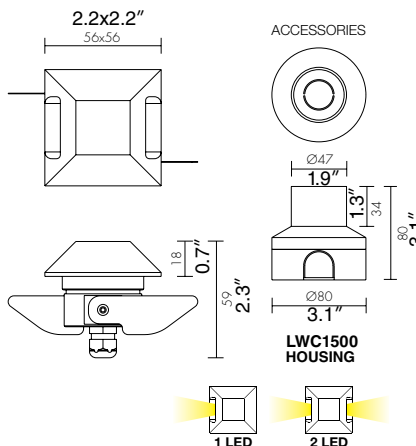

SPECIFICATION SHEET

LEDOLOGY®

WWW.LEDOLOGY.COM

BEEM™ 2
LED



LEDOLOGY®

WWW.LEDOLOGY.COM