

LUX™ RD LARGE

LED

TYPE:

PROJECT NAME:




L49201 with 24° ANTI-GLARE REFLECTOR
L49203 with 50° ANTI-GLARE REFLECTOR




L49211 with FROSTED DIFFUSER


LUX RD LARGE DIMENSIONS

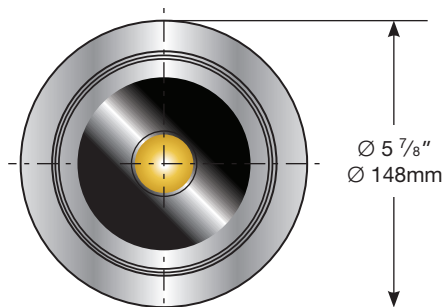

TRIM DIMENSIONS

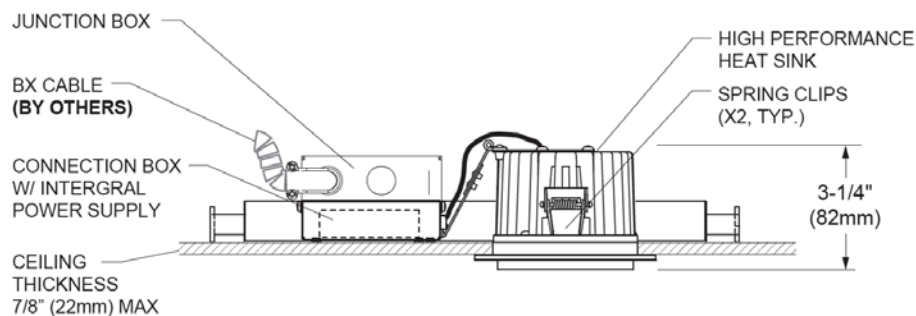

FRONT VIEW

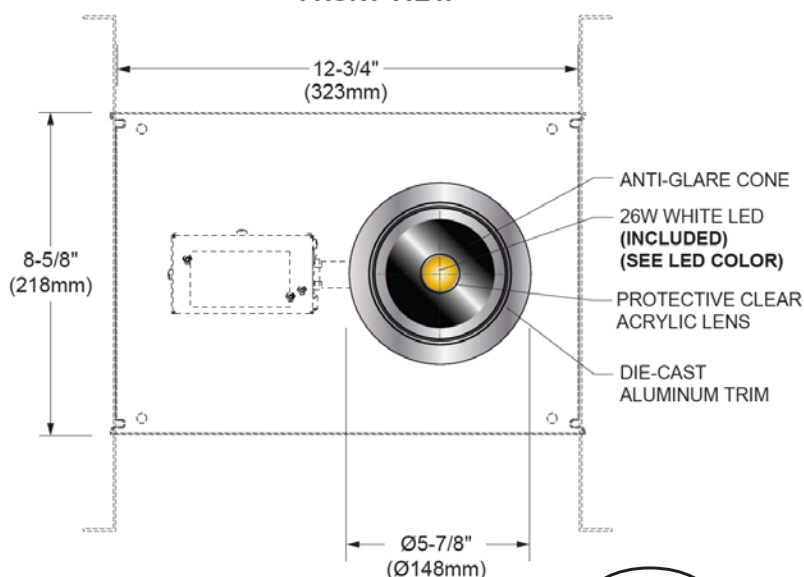

BOTTOM VIEW



CUTOUT DIMENSION
Ø 5" (125mm)

L492 — — — —
OPTICS LED COLOUR FINISH VOLTAGE

The LUX RD LARGE light is made of die-cast aluminum trim and high-performance heatsink. The shape of the faceted reflector gives a strong light without glare. This lighting solution creates a powerful effect and saves energy.

LAMPING: 1 × 26W BRIDGELUX LED ES STAR 2200lm, 80CRI+

LUMINAIRE EFFICACY: 50 lm/W (3000k w/o Diffuser)

USE: DRYWALL ONLY

HOUSING: PLASTER FRAME (INCLUDED)

OPTICS

- ☐ **01. 24° REFLECTOR**
- ☐ **03. 50° REFLECTOR**
- ☐ **11. FROSTED DIFFUSER**

LED COLOUR

- ☐ **00. 4000K WHITE**
- ☐ **01. 3000K WHITE**

FINISHES

- ☐ **01. WHITE**
- ☐ **10. GRAY**

VOLTAGE

- ☐ 120V
- ☐ 277V

SPECIFICATION SHEET

LEDOLOGY®



WWW.LEDOLOGY.COM

LUX™ RD LARGE

LED INSULATED

TYPE:

PROJECT NAME:




L49201 with 24° ANTI-GLARE REFLECTOR
L49203 with 50° ANTI-GLARE REFLECTOR



L49211 with FROSTED DIFFUSER

LUX RD LARGE DIMENSIONS

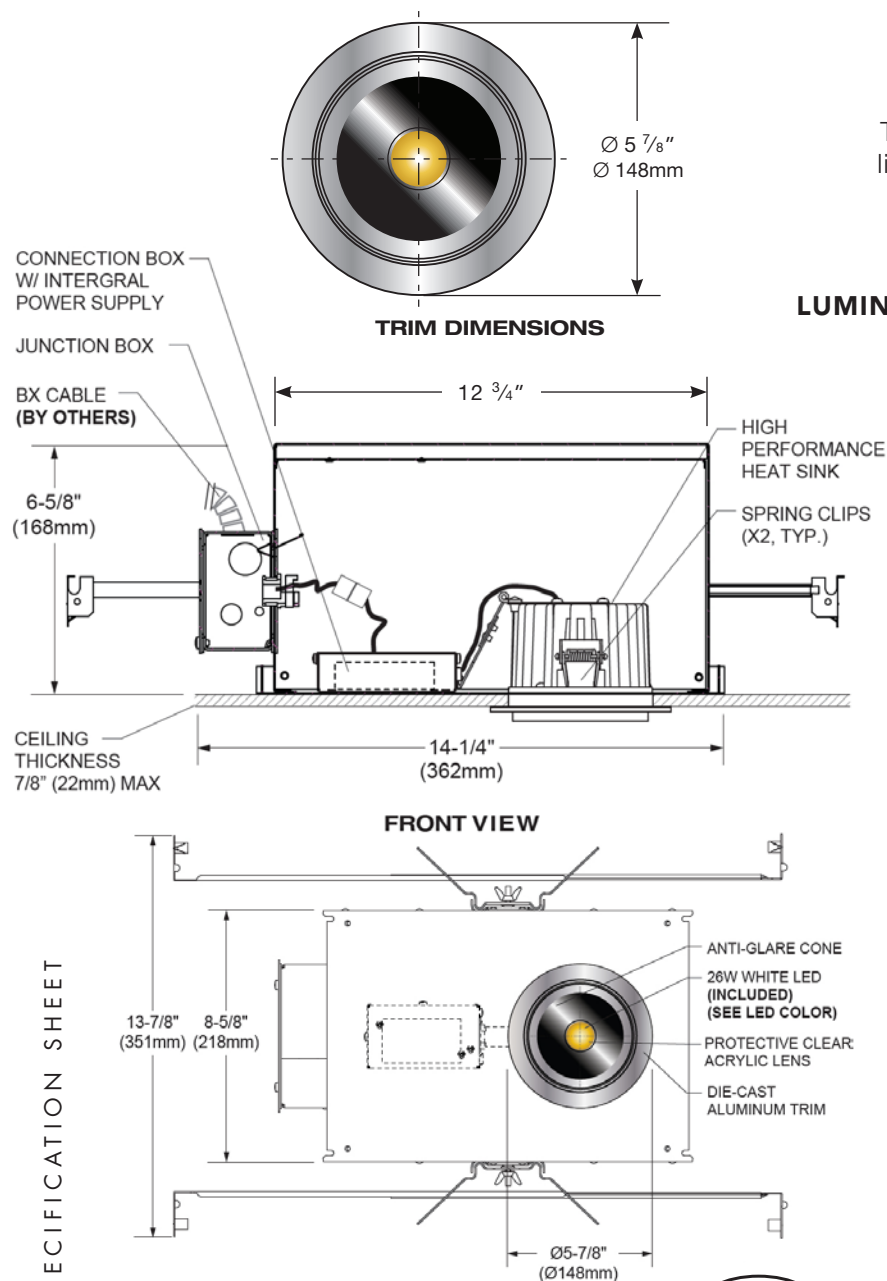

L492 — — — —
OPTICS LED COLOUR FINISH VOLTAGE

The LUX RD LARGE light is made of die-cast aluminum trim and high-performance heatsink. The shape of the faceted reflector gives a strong light without glare. This lighting solution creates a powerful effect and saves energy.

LAMPING: 1 × 26W BRIDGELUX LED ES STAR 2200lm, 80CRI+

LUMINAIRE EFFICACY: 50 lm/W (3000k w/o Diffuser)

USE: DRYWALL ONLY

HOUSING: INSULATION BOX (INCLUDED)

OPTICS

- ☐ **01. 24° REFLECTOR**
- ☐ **03. 50° REFLECTOR**
- ☐ **11. FROSTED DIFFUSER**

LED COLOUR

- ☐ **00. 4000K WHITE**
- ☐ **01. 3000K WHITE**

FINISHES

- ☐ **01. WHITE**
- ☐ **10. GRAY**

VOLTAGE

- ☐ 120V
- ☐ 277V

SPECIFICATION SHEET

LEDOLOGY®



CUTOUT DIMENSION
Ø 5" (125mm)



WWW.LEDOLOGY.COM