


RINGER™

Wall LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

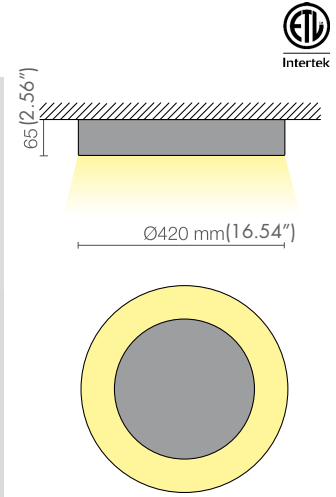



L252689.30  LED 20W 3000K 2000lm 700mA CRI>80 A+  147/236

L252689.40  LED 20W 4000K 2200lm 700mA CRI>80 A+

Wall or ceiling luminaire for direct light with a high efficiency LED module. It is made from steel with an epoxy powder coated finish stabilized with UV rays and a super pure 99.9% aluminium reflector with a metallic or patinted finish. The light source is positioned to provide discreet and effective lighting without glare. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

SPECIFICATION SHEET

08  Bianco satinato RAL 9003
Frosted white RAL 9003

22  Grigio RAL 9006
Grey RAL 9006

Included: driver
EM = Emergency autonomy 1 hour
DIMM2 = Digital dimmable
Photobiological risk group 0,
in compliance with Standard EN 62471

VOLTAGE 120V 220V 277V

LEDOLOGY®

WWW.LEDOLOGY.COM