

CLARO™

SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

CLARO

Available in two different dimensions, Claro introduces itself with a fun-loving style, perfect to liven up the office or the home. Hanging luminaire with a turned case made of epoxy powder coated finish aluminum stabilized with UV rays, it is equipped with a Chip On Board technology high efficiency LED light source. Driver, cables for suspension in galvanized steel with a 1.2 mm diameter, 500 cm of three wire electrical cable 3x1 mm² and ceiling attachment in painted steel included. Possibility to personalize the product by choosing among the different available reflectors. Dimmable version available on request. The de-gree of protection against the penetration of dust, solid objects and liquids is IP40.

LEDOLOGY®

WWW.LEDOLOGY.COM

CLARO™

SUSPENSION

TYPE:

PROJECT NAME:



CLARO LED SMALL


code	W	Lm (3000K)	lifetime	
L25LD018PN...	18	2615	75.000h	L80/B10
L25LD032PN...	32	4500	75.000h	L80/B10




/DIMM2 DALI
/DIMM3 0-10V

SPECIFICATION SHEET

SL	LED
AL	<i>included</i>
	-
TC	.30 per 3000K / .40 per 4000K
IP	40
CRI	>80 (CRI93 and CRI97 on request)
SDCM	3
EEL	A++
RG	1
08	<i>Frosted white</i>
22	<i>Grey</i>
A	<i>shades not included</i>

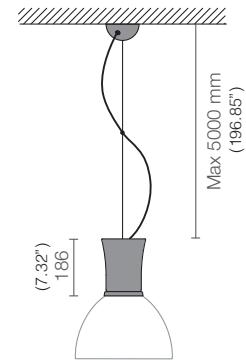

CLARO SMALL SHADES

code		description
3002		Shade in transparent acrylic, ø 315 mm, h 180 mm (Ø12.4", h 7.08")
2005		Shade in anodized aluminium, ø 325 mm, h 201 mm (Ø12.79", h 7.91")
2005-VO		Shade in anodized aluminium with glass, ø 325 mm, h 201 mm (Ø12.79", h 7.91")
2011		Shade acrylic-aluminium double diffusion, ø 325 mm, h 201 mm (Ø12.79", h 7.91")
2011-VO		Shade acrylic-aluminium double diffusion with glass, ø 325 mm, h 201 mm (Ø12.79", h 7.91")
2013		Shade acrylic- white aluminium double diffusion, ø 325 mm h 201 mm (Ø12.79", h 7.91")
2013-VO		Shade acrylic- white aluminium double diffusion with glass, ø 325 mm, h 201 mm (Ø12.79", h 7.91")

CLARO™

SUSPENSION

TYPE:

PROJECT NAME:





CLARO LED MEDIUM


code	W	Lm (3000K)	lifetime	
L25LD037MN...*	38	5160	60.000h	L80/B10
L25LD056MN...	55	8100	60.000h	L80/B10



/DIMM2 DALI
/DIMM3 0-10V

SPECIFICATION SHEET

SL	 LED
AL	<i>included</i>
	-
TC	.30 per 3000K / .40 per 4000K
IP	40
CRI	>80 *(CRI93 and CRI97 on request)
SDCM	3
EEL	A++
RG	1
08	<i>Frosted white</i>
22	<i>Grey</i>
A	<i>Shades not included</i>



LEDOLOGY®

WWW.LEDOLOGY.COM

CLARO™

SUSPENSION

TYPE:

PROJECT NAME:

CLARO MEDIUM SHADES

code

description

2003



Shade in anodized aluminium, ø 460 mm, h 291 mm (Ø18.11", h 11.45")

2003-VO



Shade in anodized aluminium with glass, ø 460 mm, h 291 mm (Ø18.11", h 11.45")

3001



Shade in transparent acrylic, ø 410 mm, h 273 mm (Ø16.14", h 10.75")
