

DELTA™

CEILING MOUNT

TYPE:

PROJECT NAME:



DELTA Ø110


code	W	Lm (3000K)	AL	Beam angle	EEL	lifetime
L252621.30AC...	30	2700	N/A	45°	A+	40.000h
L252621.24...	24	3580	incl.	36°	A++	60.000h

- SL LED
- AL (see table)
- (see table)
- TC .30 per 3000K / .40 per 4000K
- IP 40
- CRI >80
- SDCM 3
- EEI (see table)
- RG 1
- 02 Matte black
- 08 Frosted white



DELTA

Ø110
Ø130

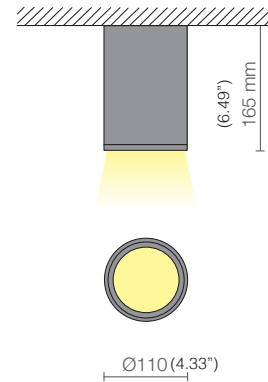

A cylindrical body which interacts with the linearity of the ceiling to create inter-esting volumetric effects. Delta is a ceiling luminaire equipped with a Chip On Board technology high efficiency LED light source. Made from epoxy powder coated finish aluminum stabilized with UV rays, it is provided with an aluminum reflector, transparent protective screen and driver (when necessary). The product is available in two sizes with different luminous flux and there is also an AC version. Dimmable versions available on request. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET


DELTA™



CEILING MOUNT

TYPE:

PROJECT NAME:

DELTA Ø130

code	W	Lm (3000K)	AL		EEL	lifetime	
L252622.40AC...	40	3600	N/A	40°	A+	40.000h	
L252622.32...	32	4500	incl. 900mA	30°	A++	60.000h	L80/B10
L252622.38...	38	5165	incl. 1050mA	30°	A++	50.000h	L80/B10


- SL  LED
- AL (see table)
-  (see table)
- TC .30 per 3000K / .40 per 4000K
- IP 40
- CRI >80
- SDCM 3
- EEL (see table)
- RG 1
- 02 Matte black
- 08 Frosted white



DELTA

Ø110
Ø130

A cylindrical body which interacts with the linearity of the ceiling to create inter-esting volumetric effects. Delta is a ceiling luminaire equipped with a Chip On Board technology high efficiency LED light source. Made from epoxy powder coated finish aluminum stabilized with UV rays, it is provided with an aluminum reflector, transparent protective screen and driver (when necessary). The product is available in two sizes with different luminous flux and there is also an AC version. Dimmable versions available on request. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

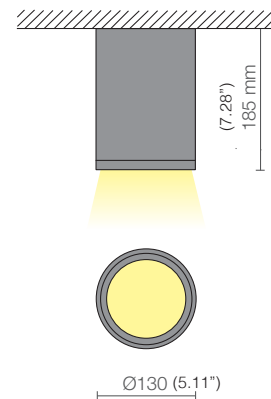

SPECIFICATION SHEET