

# DITO™

Ceiling LED

TYPE:

PROJECT NAME:

MODEL #


FINISH

LED COLOR

OPTIC

DRIVER

VOLTAGE

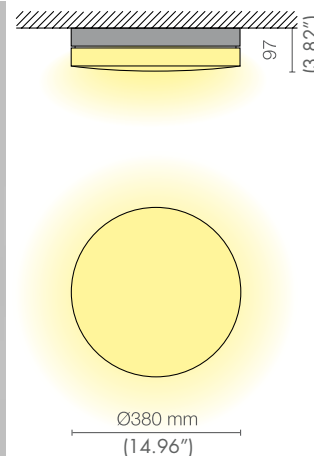

**L252672.30**  LED 30W 3000K 2900lm 700mA CRI>80 A+  144/236

**L252672.40**  LED 30W 4000K 3300lm 700mA CRI>80 A+

Ceiling or wall luminaire with diffuse light with a high efficiency LED module. It is made from epoxy powder coated finish aluminium stabilized with UV rays and satin polyethylene light diffuser providing a uniform and discreet light beam. The luminaire is supplied with a driver. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET

- 03  Nero lucido  
Glossy black
- 08  Bianco satinato RAL 9003  
Frosted white RAL 9003
- 12  Cromo verniciato  
Chrome painted
- 36  Tortora lucido RAL 1019  
Glossy dove grey RAL 1019

Included: driver  
Photobiological risk group 0,  
in compliance with Standard EN 62471,

VOLTAGE

☐ 120V

☐ 220V

☐ 277V

**LEDOLOGY®**

WWW.LEDOLOGY.COM