

# FUSION™









WALL LED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

-   $\downarrow 70^\circ / \uparrow 120^\circ$
-  TC 3000K / 4000K
-  IP 40
-  CRI >80
-  EEI A++
-  RG 0
-  08 Satin white
- 


FUSION PRO LIGHT BIDIFFUSION

CODE	W	Lm (3000K)
L25A9-616.2.028...	2x9	2x1100
L25A9-616.2.056...	2x18	2x2200
L25A9-616.2.084...*	2x27	2x3300
L25A9-616.2.112...*	2x35	2x4400
L25LE001-30/100**	beam lens 30°	


/DIMM2 dimmerabile protocollo DALI

/DIMM3 dimmerabile switch-DIM


\*double switch, \*\*code per meter

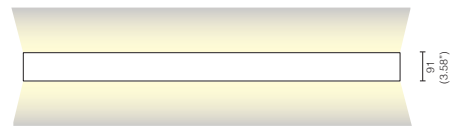

mm	CODE
(13") 330	L25A9-616.2.028...
(22.87") 581	L25A9-616.2.056...
(33.9") 861	L25A9-616.2.084...*
(44.9") 1141	L25A9-616.2.112...*

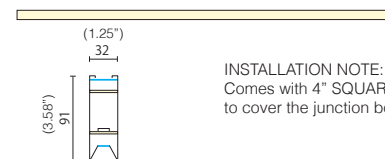

INSTALLATION NOTE:  
Comes with 4" SQUARE backplate  
to cover the junction box



# FUSION™

WALL LED

TYPE:

PROJECT NAME:

## FUSION PRO BIDIFFUSION

CODE	W	Lm (3000K)	
L25A9-617.2.028...	2x10	2x1320	
L25A9-617.2.056...	2x20	2x2640	/DIMM2 /DIMM3
L25A9-617.2.084...*	2x30	2x3960	
L25A9-617.2.112...*	2x40	2x5280	
L25LE001-30/100**	<i>beam lens 30°</i>		


/DIMM2 dimmerabile protocollo DALI

/DIMM3 dimmerabile switch-DIM


\*double switch, \*\*code per meter



mm	CODE
(13") 330	L25A9-617.2.028
(22.87") 581	L25A9-617.2.056
(33.9") 861	L25A9-617.2.084
(44.9") 1141	L25A9-617.2.112



INSTALLATION NOTE:  
Comes with 4" SQUARE backplate  
to cover the junction box



SPECIFICATION SHEET

# FUSION™

WALL LED

TYPE:

PROJECT NAME:

---



SPECIFICATION SHEET