


MODEL # FINISH LED COLOUR OPTIC WATTAGE DRIVER VOLTAGE

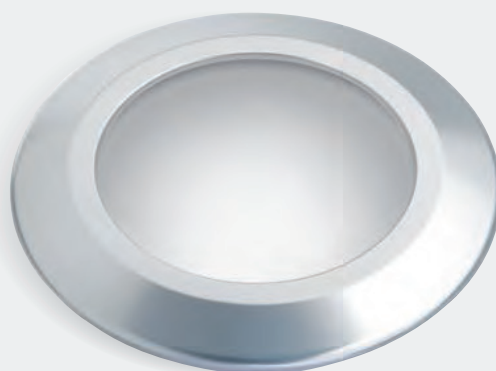

Faretto da incasso a pavimento/ parete, ideale per l'illuminazione di giardini, marciapiedi, vialetti e gradini.


Recessed floor/ wall spotlight, ideal for the lighting of gardens, sidewalks, paths and steps.

Materiale	Corpo in alluminio anticorrosivo anodizzato o in acciaio inox lavorato o satinato Vetro temperato sabbatiato N° 3 finiture standard
N° Led	4 x 1/2W + 1 x 0,25W
Potenza assorbita	4/8W
Collegamento	In parallelo rispettando le polarità
Cablaggio	Fornito con 50 cm di cavo in neoprene e pressacavo
Installazione	- Cartongesso/legno per interferenza tramite o-ring (forniti) o con molle (<i>non incluse</i>) - Muratura con cassaforma (<i>non inclusa</i>)
Alimentatore	(<i>non inclusa</i>) 24V dc p. 427
Accessori	Molla cod. ML060 p. 402 Cassaforma cod. CA081 p. 400
Fotometrie	p. 406
Note	Equipaggiato con D.O.B. System LED di cortesia blu

Material	Body made of anticorrosive anodized aluminium or worked/satinized stainless steel Tempered satinized glass No. 3 standard finishings
Led no.	4 x 1/2W + 1 x 0,25W
Power absorption	4/8W
Connection	Parallel connection respecting polarities
Wiring	Provided with 50 cm long bipolar neoprene cable + cable gland
Installation	- On the ceiling/ wood through o-ring (included) or springs (<i>not included</i>) - On brickwork with housing box (<i>not included</i>)
Power supply	(<i>not included</i>) 24V dc p. 427
Accessories	Spring code ML060 p. 402 Housing box code CA081 p. 400
Photometries	p. 406
Note	Equipped with D.O.B. System and blue courtesy LED

giunome R


IP68NP CE F III Finish: A kg 0,400 R-Finish: LS kg 0,600 kg 500 ø mm 80 WP



CODE	OPTIONS	SUPPLY	N°LED	LED COLOUR	OPTICS	WATT	FINISHING	DIMMER
L6GIU
	R Round	V CV	4	1 6000°K 2 4000°K 3 3000°K W 2700°K 4 Red 5 Green 6 Blue	4 120°	1 2	A Anod. alu. I Worked steel S Satinized steel	D Dimmer

giunome Q

IP68NP CE F III Finish: A kg 0,400 kg 500 ø mm 80 WP



CODE	OPTIONS	SUPPLY	N°LED	LED COLOUR	OPTICS	WATT	FINISHING	DIMMER
L6GIU
	Q Square	V CV	4	1 6000°K 2 4000°K 3 3000°K W 2700°K 4 Red 5 Green 6 Blue	4 120°	1 2	A Anod. alu.	D Dimmer