

MATRIX™ MICRO 2


RECESSED

TYPE:

PROJECT NAME:



Recessed square **IP40** downlight, for indoor false ceiling applications, ideal for the lighting of residential and commercial areas, shop windows, corridors, meeting rooms, offices.

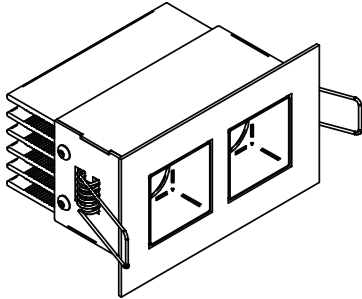

IP40




	SUPPLY	W	LM CRI>90	OPTICS	LED COLOR	CODE +	FINISH
	120Vac	12	1120	12°	2700 K	L0122321	.02 .05 .08
	120Vac	12	1200	12°	3000 K	L0122331	.02 .05 .08
	120Vac	12	1280	12°	4000 K	L0122341	.02 .05 .08
	120Vac	12	1120	28°	2700 K	L0122322	.02 .05 .08
	120Vac	12	1200	28°	3000 K	L0122332	.02 .05 .08
	120Vac	12	1280	28°	4000 K	L0122342	.02 .05 .08
	120Vac	12	1120	45°	2700 K	L0122323	.02 .05 .08
	120Vac	12	1200	45°	3000 K	L0122333	.02 .05 .08
	120Vac	12	1280	45°	4000 K	L0122343	.02 .05 .08

Finish Options

- .02** Matt white
- .05** Matt grey
- .08** Matt black

Power supply included
100 (3.93")

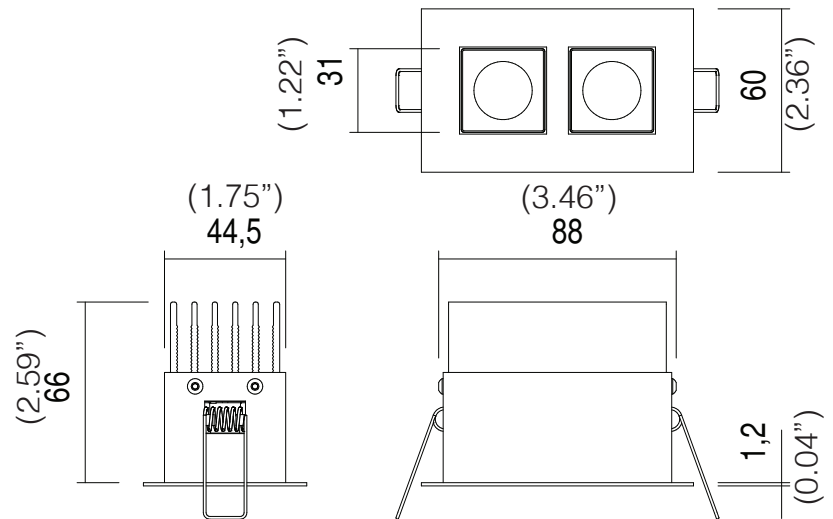

SPECIFICATION SHEET