

MINIBRITE™

OUTDOOR RECESSED LED

TYPE:

PROJECT NAME:

MODEL #	WATT	LED COLOUR	OPTICS	FINISH	VOLTAGE
---------	------	------------	--------	--------	---------

Minibrite 1.0

CE LED MARK IP68 kg 500 kg 0,20 IK 07

Ø 30x70 mm



0,5W 12Vac - 0,6W 12Vdc - 1,2W 24Vdc

L5MB1000 | Stainless Steel

LED COLOUR | OPTIC

- 0** - Cool White 5000K
 - 5** - Warm White 3000K
 - 9** - Natural White 4000K
 - F** - Warm White 2700K
- D** - Diffused



TECHNICAL DATA

Application	Ideal for pathways and marker lighting
Installation	Outdoor recessed spotlights; recessed floor spotlights
Mounting	With outer casing L5WC0201; spring-loaded ferrule accessory L5WG0300 for installation on panels, plasterboard
Material	Body and ferrule in Stainless Steel AISI316L, outer ferrule thickness 1.5mm, tempered glass
Finishes available	Stainless Steel
N° and type of LED	3 mid power LEDs
Nom. power consumption	0,5W; 0,6W; 1,2W

Power supply	12/24 Vdc; 12 Vac
Power supply unit	Not included
Connection	In parallel; wired with a 1.5m neoprene cable
Total Delivered Lumens	20 lm (3000K)
Optics	Diffused
LED colour	White: Warm White (2700K); Warm White (3000K); Natural White (4000K); Cool White (5000K)
IP	68
IK	07
UGR	-


POWER SUPPLY UNIT

0,6W - 12Vdc 1,2W - 24Vdc	N° MAX FIXTURES	PSU	IP	Page
	1...n	12 Vdc	20	479
	1...n	24 Vdc	20	479


OUTER CASINGS



ACCESSORIES

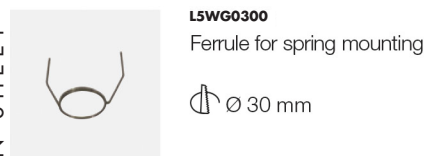


CABLES

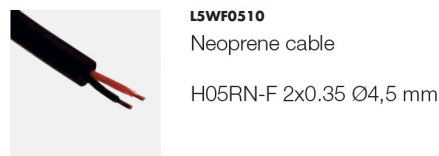

SPECIFICATION SHEET

PHOTOMETRIC CURVES

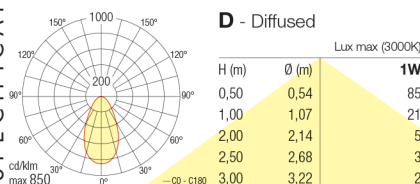



LEDOLOGY®