

# MINIBRITE™

## OUTDOOR RECESSED LED

TYPE:

PROJECT NAME:

MODEL #	WATT	LED COLOUR	OPTICS	FINISH	VOLTAGE
---------	------	------------	--------	--------	---------

### Minibrite 1.0

CE LED MARK IP68 kg 500 kg 0,20 IK 07

Ø 30x70 mm



0,5W 12Vac - 0,6W 12Vdc - 1,2W 24Vdc

**L5MB1000** | Stainless Steel

LED COLOUR | OPTIC

- 0** - Cool White 5000K
  - 5** - Warm White 3000K
  - 9** - Natural White 4000K
  - F** - Warm White 2700K
- D** - Diffused



#### TECHNICAL DATA

<b>Application</b>	Ideal for pathways and marker lighting
<b>Installation</b>	Outdoor recessed spotlights; recessed floor spotlights
<b>Mounting</b>	With outer casing L5WC0201; spring-loaded ferrule accessory L5WG0300 for installation on panels, plasterboard
<b>Material</b>	Body and ferrule in Stainless Steel AISI316L, outer ferrule thickness 1.5mm, tempered glass
<b>Finishes available</b>	Stainless Steel
<b>N° and type of LED</b>	3 mid power LEDs
<b>Nom. power consumption</b>	0,5W; 0,6W; 1,2W

<b>Power supply</b>	12/24 Vdc; 12 Vac
<b>Power supply unit</b>	Not included
<b>Connection</b>	In parallel; wired with a 1.5m neoprene cable
<b>Total Delivered Lumens</b>	20 lm (3000K)
<b>Optics</b>	Diffused
<b>LED colour</b>	White: Warm White (2700K); Warm White (3000K); Natural White (4000K); Cool White (5000K)
<b>IP</b>	68
<b>IK</b>	07
<b>UGR</b>	-


#### POWER SUPPLY UNIT

0,6W - 12Vdc 1,2W - 24Vdc	N° MAX FIXTURES	PSU	IP	Page
	1...n	12 Vdc	20	479
	1...n	24 Vdc	20	479


#### OUTER CASINGS



#### ACCESSORIES

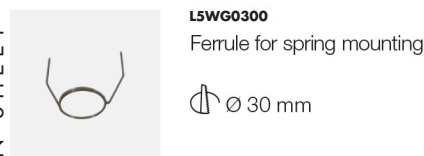


#### CABLES

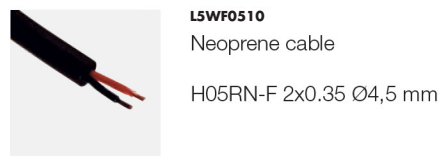

SPECIFICATION SHEET

#### PHOTOMETRIC CURVES

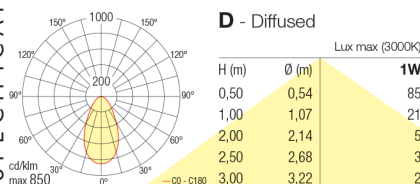



LEDOLOGY®