



■ RING

Ø420

Ø520


Wall-ceiling luminaire characterized by a strong personality, Ring is made from epoxy powder coated finish aluminum stabilized with UV rays and provided with a super pure 99.9% aluminum reflector with a metallic or painted finish. Equipped with a high efficiency LED module positioned to provide discreet and effective light without glare. Driver included. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

RING™ 420

CEILING/WALL

TYPE:

PROJECT NAME:

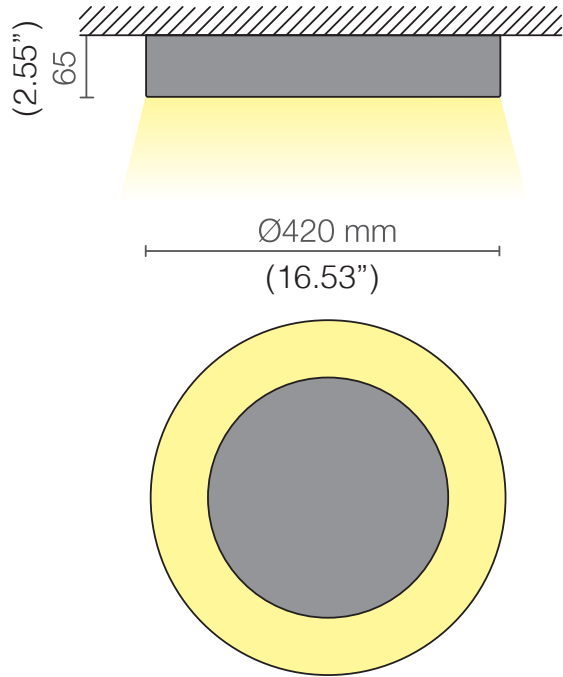

RING Ø420

codice	W	Lm	lifetime	
2689...	20	2000 (3000K) 2200 (4000K)	50.000h	L70/B30

SL	LED	SDCM	3
AL	<i>included</i>	EEL	A+
	130°	RG	0
IP	20	08	<i>Frosted white</i>
CRI	>80	22	<i>Grey</i>

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
L252689 20W	<input type="radio"/> 08: Frosted White <input type="radio"/> 22: Grey	<input type="radio"/> 130: 130°	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 02/03/25

RING™ 520

CEILING/WALL

TYPE:

PROJECT NAME:

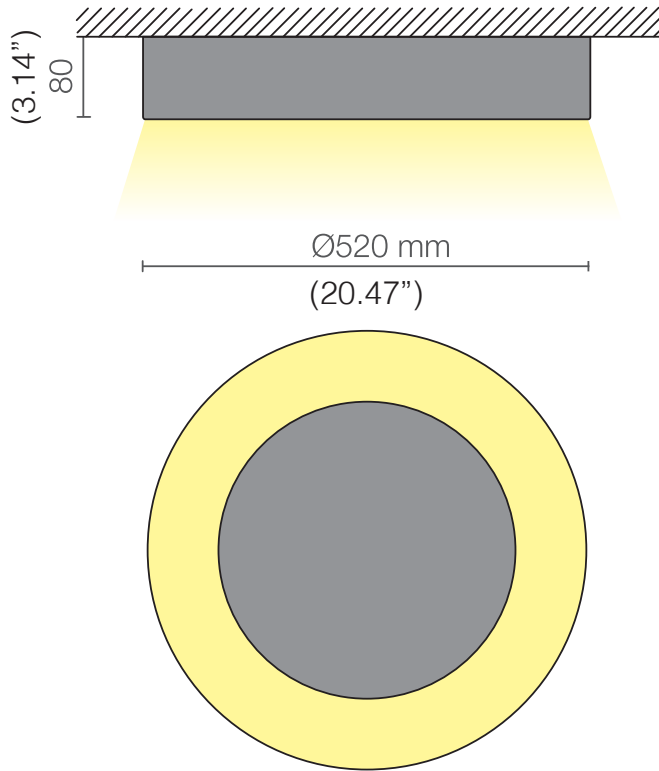

RING Ø520

codice	W	Lm (3000K)	lifetime
2690...	30	2900	50.000h L70/B30

SL	LED	SDCM	3
AL	included	EEL	A+
	140°	RG	0
IP	20	08	Frosted white
CRI	>80	22	Grey

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
<input type="radio"/> L252690 30W	<input type="radio"/> 08: Frosted White <input type="radio"/> 22: Grey	<input type="radio"/> 130: 140°	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 02/03/25