

MICRO BRITE™

RECESSED

TYPE:

PROJECT NAME:

LIGHTING FEATURES


LED COLOUR	2200K, 2700K, 3000K, 4000K, Red, Green, Blue
CRI	>80 (2200K, 2700K, 3000K, 4000K)
OPTICS	60°
3000K TOTAL NOMINAL LUMENS	1W 79lm
AVERAGE LED LIFE	50.000h L80 B10

MECHANICAL FEATURES

WEIGHT	kg 0,02
FINISHES	Steel
INSTALLATION	Recessed in ground with housing box, recessed in plasterboard or wood with spring, recessed in brickwork with housing box
MATERIAL	Anticorodal anodized aluminum body, anodized aluminum or AISI 316L stainless steel trim, transparent tempered glass and PMMA lens

GENERAL FEATURES

OPERATING TEMPERATURE	-10°C +45°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK06
GLOW WIRE TEST	960°C
CLASS	II

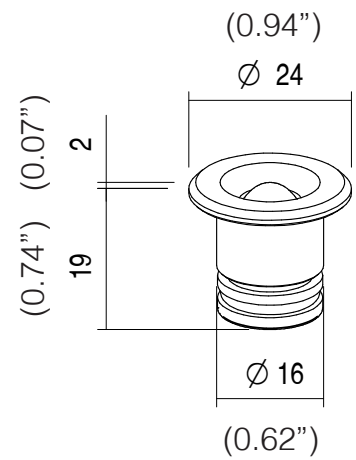

ORDERING INFO

MICROBRITE 1W	S	60			
Model (Order Code)	Structure Finish	Optic Options	Accessories	LED	Remote Driver
<input type="radio"/> MICROBRITE 1W	<input type="radio"/> S: AISI 316L Stainless Steel Marine Grade	<input type="radio"/> 60: 60°	<input type="radio"/> ML016: Torsion Spring <input type="radio"/> CAS16: Housing Box	<input type="radio"/> 22: 2200K <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K <input type="radio"/> R: Red <input type="radio"/> G: Green <input type="radio"/> B: Blue	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V




SPECIFICATION SHEET


MICRO BRITE™


RECESSED - ACCESSORIE


TYPE:

PROJECT NAME:

CODE	ML016
TPOLOGY	Torsion spring  kg 0,001
MATERIAL	Stainless steel



CODE	CAS16
TPOLOGY	Housing box  kg 0,013
MATERIAL	Prolypropylene

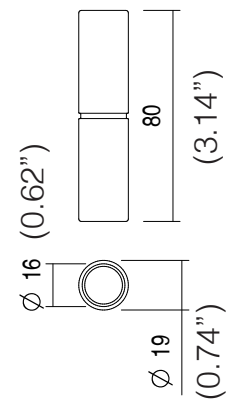

SPECIFICATION SHEET