

MINI BRITE™

RECESSED

TYPE:

PROJECT NAME:

LIGHTING FEATURES


LED COLOUR	2200K, 2700K, 3000K, 4000K, Red, Green, Blue
CRI	>80 (2200K, 2700K, 3000K, 4000K)
OPTICS	18°, 35°, 57°
3000K REAL OUTPUT FLUX	2,2W 102lm 35°
AVERAGE LED LIFE	50.000h L80 B10

MECHANICAL FEATURES

WEIGHT	kg 0,06
FINISHES	Anodized aluminum, Steel
INSTALLATION	Recessed in ground with housing box, recessed in plasterboard or wood with spring, recessed in brickwork with housing box
MATERIAL	Anticorodal anodized aluminum body, anodized aluminum or AISI 316L stainless steel trim, transparent tempered glass and PMMA lens

GENERAL FEATURES

OPERATING TEMPERATURE	-10°C +45°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK07
GLOW WIRE TEST	960°C
CLASS	II

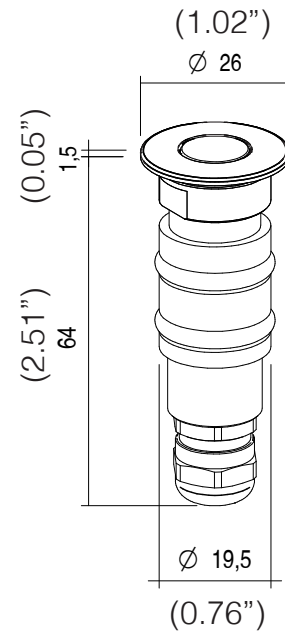

ORDERING INFO

MINIBRITE 2.2W

Model (Order Code)	Structure Finish	Optic Options	Accessories	LED	Remote Driver
<input type="radio"/> MINIBRITE 2.2W	<input type="radio"/> A: Anodized Aluminum <input type="radio"/> S: AISI 316L Stainless Steel Marine Grade	<input type="radio"/> 60: 60° <input type="radio"/> 60: 60° <input type="radio"/> 60: 60°	<input type="radio"/> ML021: Torsion Spring <input type="radio"/> CAS20: Housing Box	<input type="radio"/> 22: 2200K <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K <input type="radio"/> R: Red <input type="radio"/> G: Green <input type="radio"/> B: Blue	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 08/19/24


MINI BRITE™


RECESSED - ACCESSORIE

TYPE:

PROJECT NAME:

CODE	ML021
TPOLOGY	Torsion spring  kg 0,001
MATERIAL	Stainless steel



CODE	CAS20
TPOLOGY	Housing box  kg 0,013
MATERIAL	Prolypropylene

