

WETT™ MINI

RECESSED INGROUND SUBMERSIBLE

TYPE:

PROJECT NAME:

LIGHTING FEATURES


LED COLOUR	2200K, 2700K, 3000K, 4000K, Red, Green, Blue
CRI	>80 (2200K, 2700K, 3000K, 4000K)
OPTICS	18°, 35°, 57°
3000K REAL OUTPUT FLUX	2,2W 102lm 35°
AVERAGE LED LIFE	50.000h L80 B10

MECHANICAL FEATURES

WEIGHT	kg 0,55
FINISHES	Steel
INSTALLATION	Recessed in ground with housing box, recessed in brickwork with housing box, installation out of water with standard housing box, permanent immersion installation with IP68 housing box
MATERIAL	AISI 316L stainless steel body, AISI 316L stainless steel trim, transparent tempered glass and PMMA lens

GENERAL FEATURES

OPERATING TEMPERATURE	-10°C +45°C
INGRESS PROTECTION	IP68
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
APPLIANCE CLASS	II

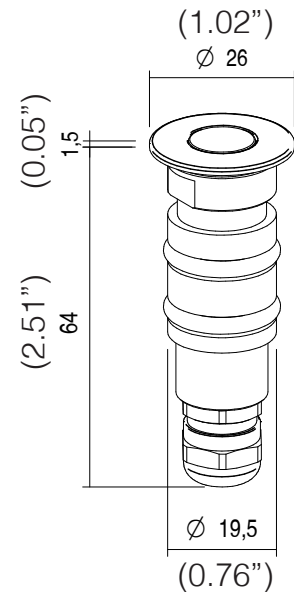

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	Accessories	LED	Remote Driver
<input type="radio"/> WETTMINI 2.2W	<input type="radio"/> S: AISI 316L Stainless Steel Marine Grade	<input type="radio"/> 18: 18° <input type="radio"/> 35: 35° <input type="radio"/> 57: 57°	<input type="radio"/> CAS20: Housing Box <input type="radio"/> CA821: Housing Box	<input type="radio"/> 22: 2200K <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K <input type="radio"/> R: Red <input type="radio"/> G: Green <input type="radio"/> B: Blue	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 08/20/24


WETT™ MINI



RECESSED - ACCESSORIE


TYPE:

PROJECT NAME:

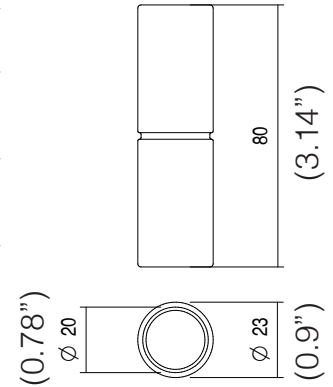CODE	CAS20
TPOLOGY	Housing box  kg 0,013
MATERIAL	Prolypropylene



CODE	CA821
TPOLOGY	IP68 Housing box   kg 0,07
MATERIAL	PVC

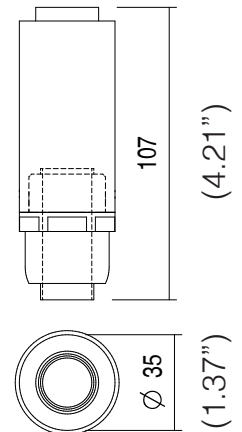

SPECIFICATION SHEET