

BAT™

SUSPENSION

TYPE:

PROJECT NAME:




SPECIFICATION SHEET

BAT™

SUSPENSION

TYPE:

PROJECT NAME:

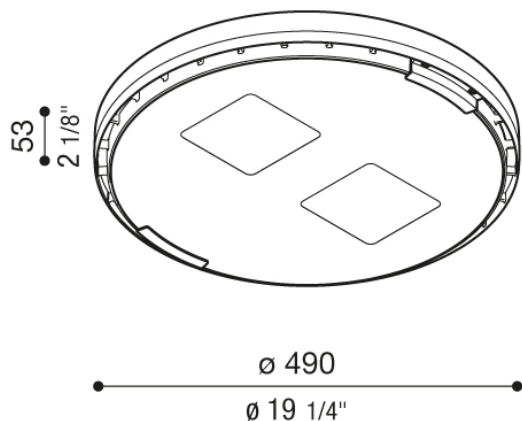

Lumen:

| Power | Source Lumen | Delivered Lumen |
|-------|--------------|-----------------|
| 30W | 5996 lm | 5280 lm |
| 45W | 8200 lm | 7221 lm |
| 65W | 11059 lm | 9739 lm |
| 95W | 15100 lm | 13298 lm |

Technical information:

| | |
|--------------------------|--------------------|
| Installation: | Suspension/Ceiling |
| Material: | Aluminum |
| Source type: | LED |
| Diffuser type: | Transparent glass |
| CRI: | >80 |
| LB Factor: | L80B10 - 50.000h |
| Power consumption [Watt] | 30 / 45 / 65 / 95 |
| Source Lumen: | 5996 - 15100 lm |
| Delivered Lumen: | 5280 - 13298 lm |
| Type of protection: | IP66 |

SPECIFICATION SHEET

ORDERING INFO

| Model (Order Code) | Structure Finish | Optic Options | LED | Dimming Options |
|---|--|--|---|--|
| <input type="radio"/> L53 BATSUSPENSION | <input type="radio"/> BL: Black RAL9005 <input type="radio"/> CO: Corten <input type="radio"/> GR: Grey RAL9006 <input type="radio"/> WH: White RAL9010 | <input type="radio"/> S6: Symmetric 60° <input type="radio"/> S9: Symmetric 90° <input type="radio"/> E: Ellittico <input type="radio"/> W: Wall Washer | <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5700K | <input type="radio"/> 120V LTE <input type="radio"/> 120V 0-10V <input type="radio"/> 277V 0-10V |



LEDODOLOGY®

A **Luminart** BRAND





WWW.LEDOLOGY.COM

BAT™ 30W

SUSPENSION

TYPE:

PROJECT NAME:

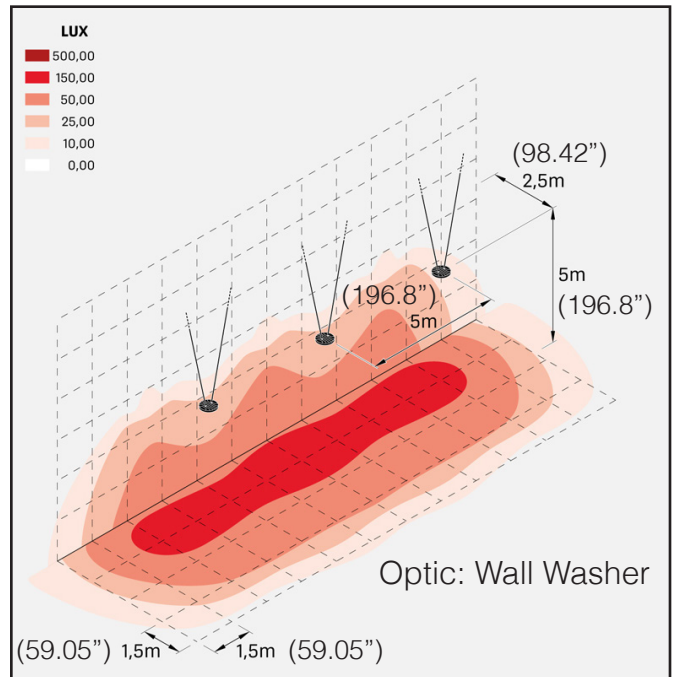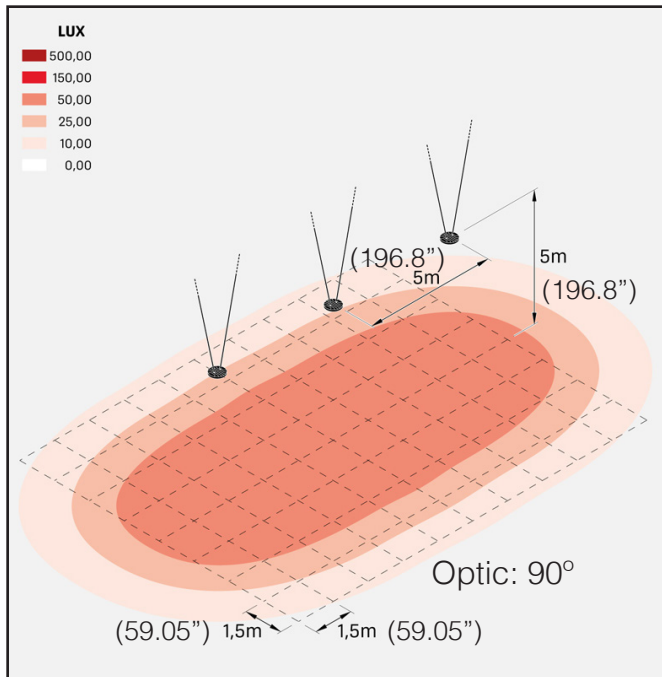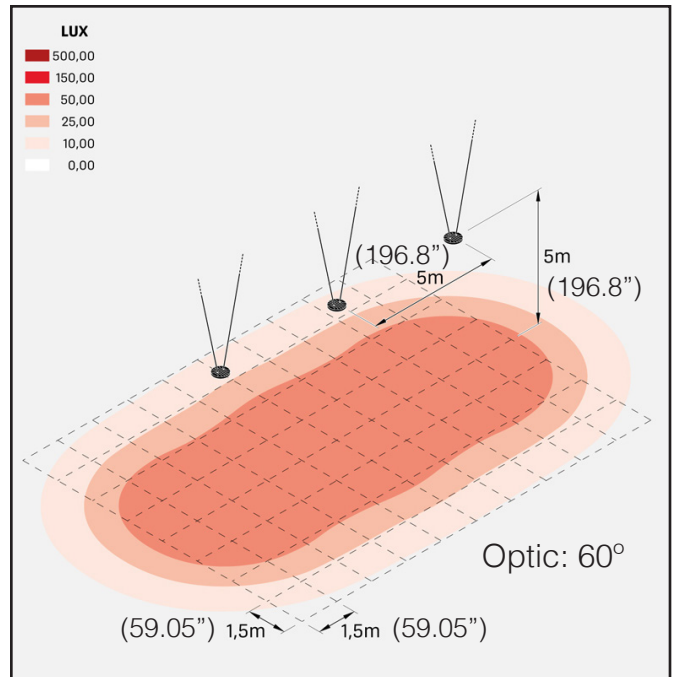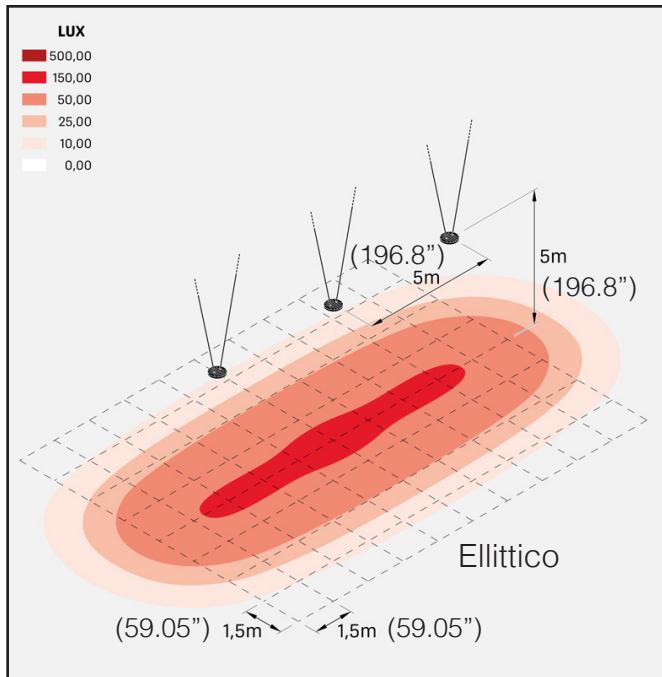





SPECIFICATION SHEET

BAT™ 45W

SUSPENSION

TYPE:

PROJECT NAME:

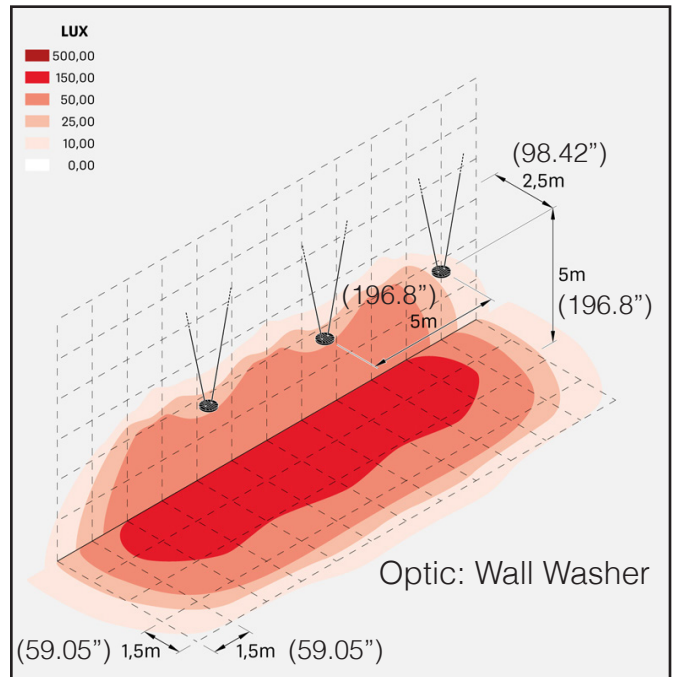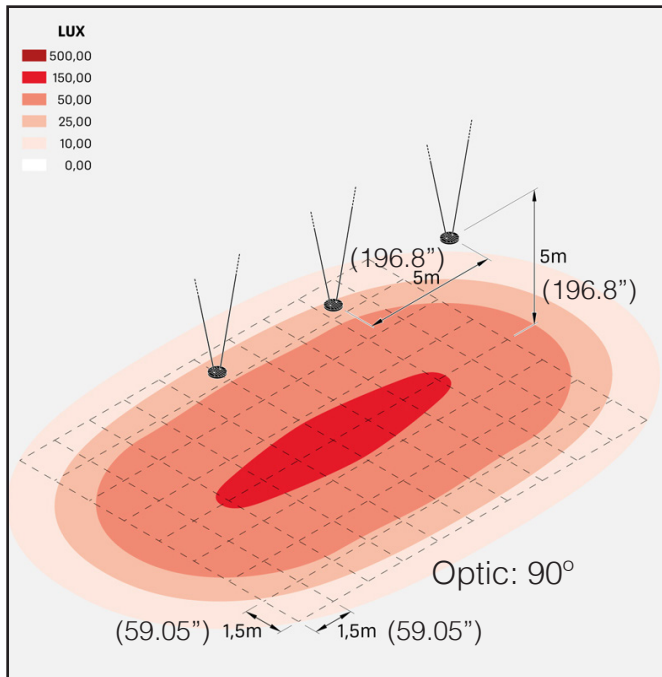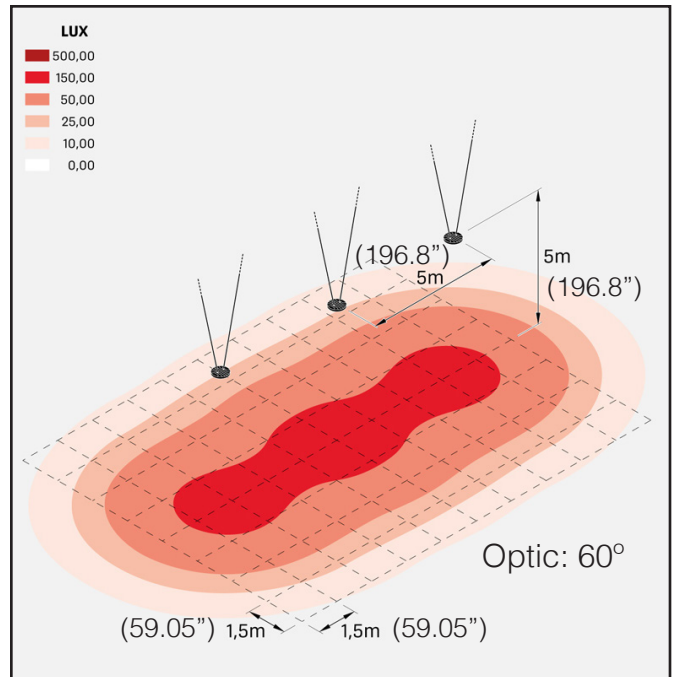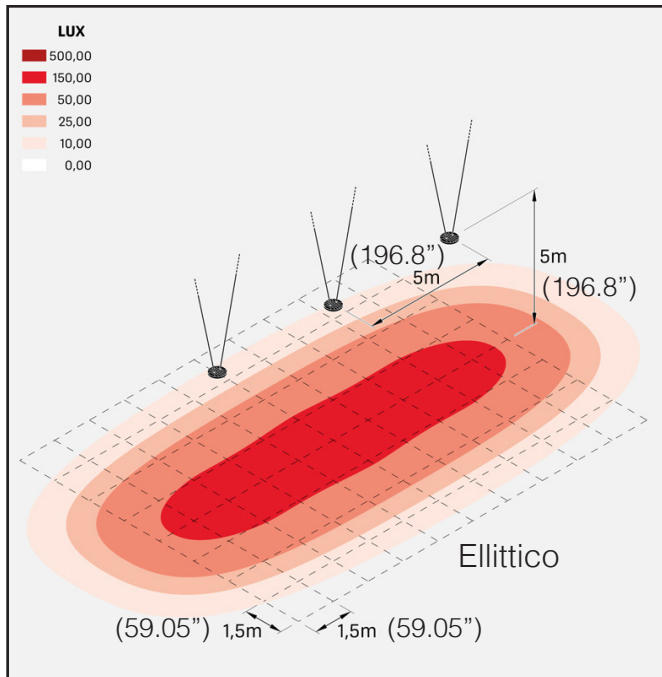





SPECIFICATION SHEET

BAT™ 65W

SUSPENSION

TYPE:

PROJECT NAME:

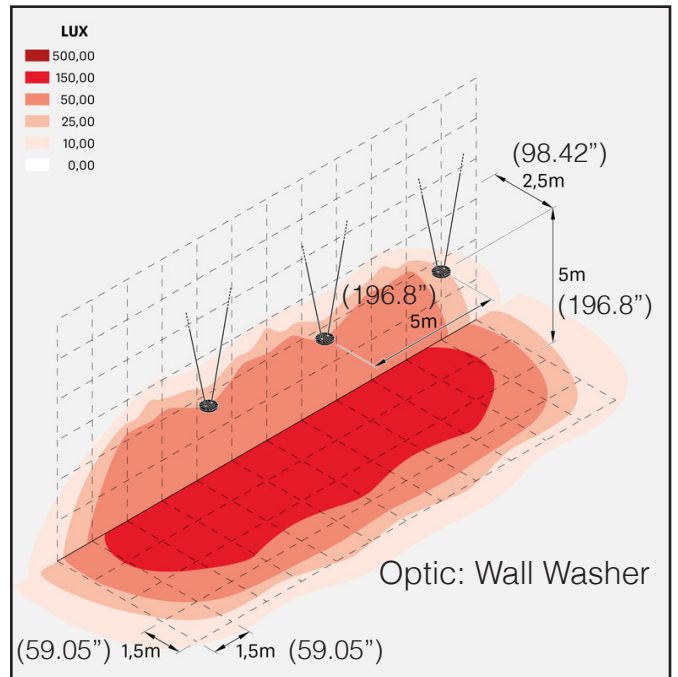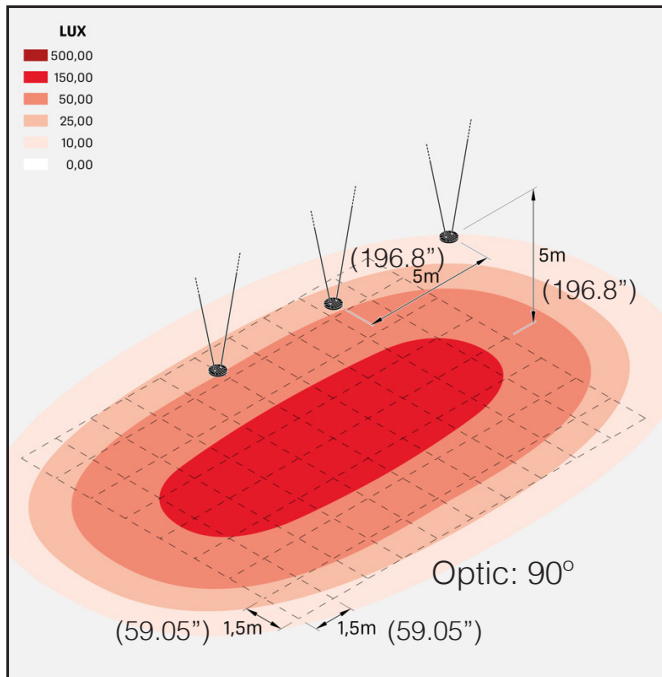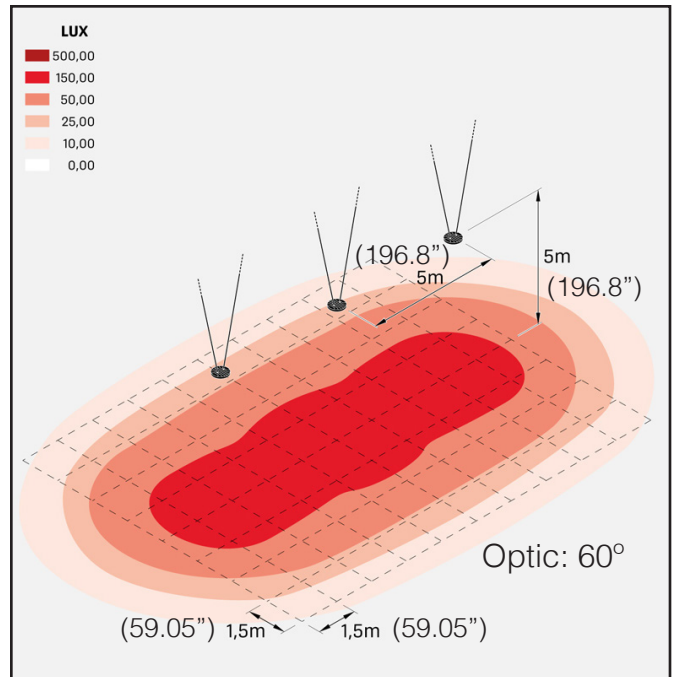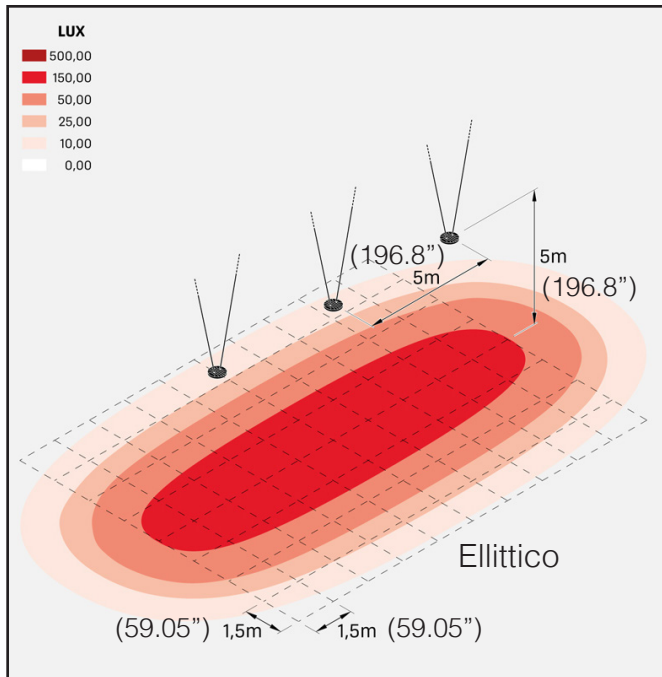





SPECIFICATION SHEET

BAT™ 95W

SUSPENSION

TYPE:

PROJECT NAME:

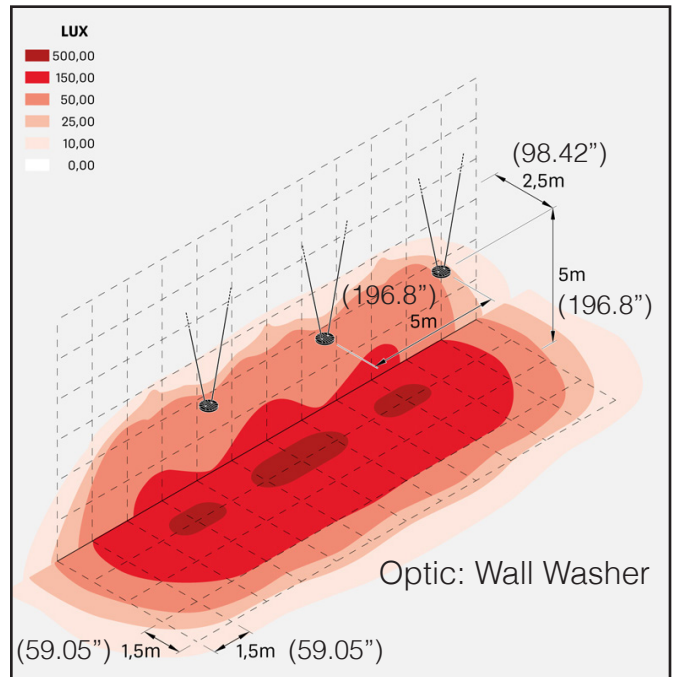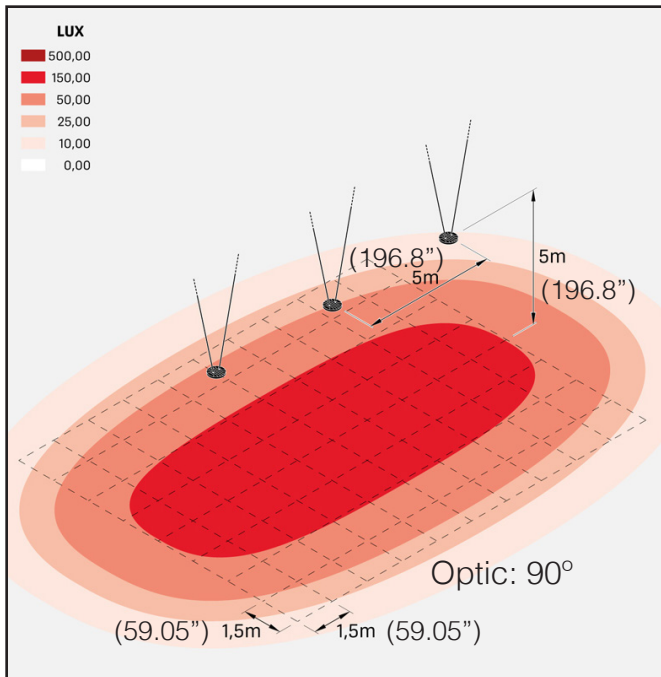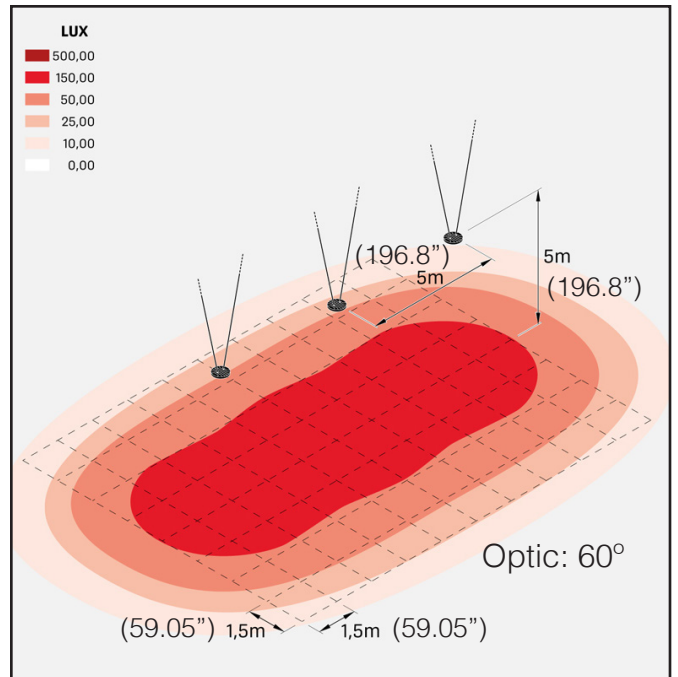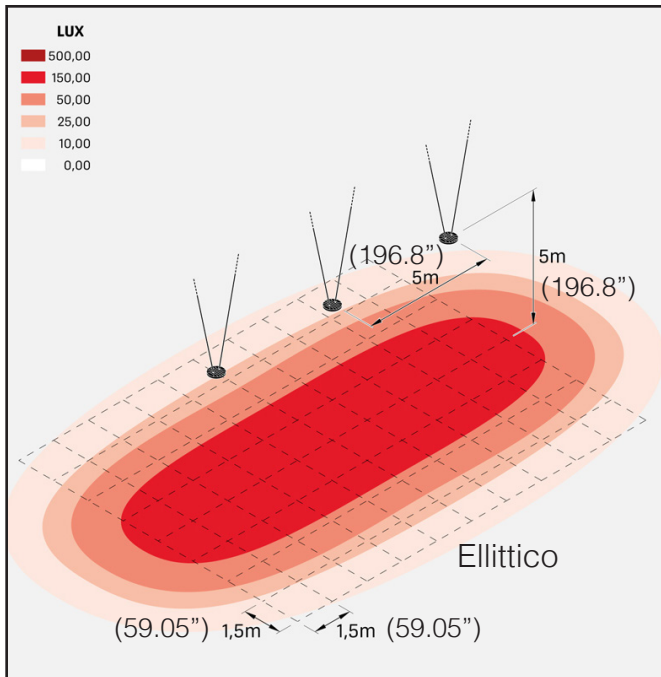

SPECIFICATION SHEET