

# LCQ™ 630

CEILING

**TYPE:**

**PROJECT NAME:**



Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
38W	4152 lm	4417 lm
56W	5721 lm	6086 lm

630  
(24.8")

46  
(1.81")

03 White   
  06 Grey   
  05 Black   
  70 Anthracite

## ORDERING INFO

L595033

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595033	<input type="radio"/> 38: 38W <input type="radio"/> 56: 56W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET




# LCQ™ 910

CEILING


**TYPE:**

**PROJECT NAME:**

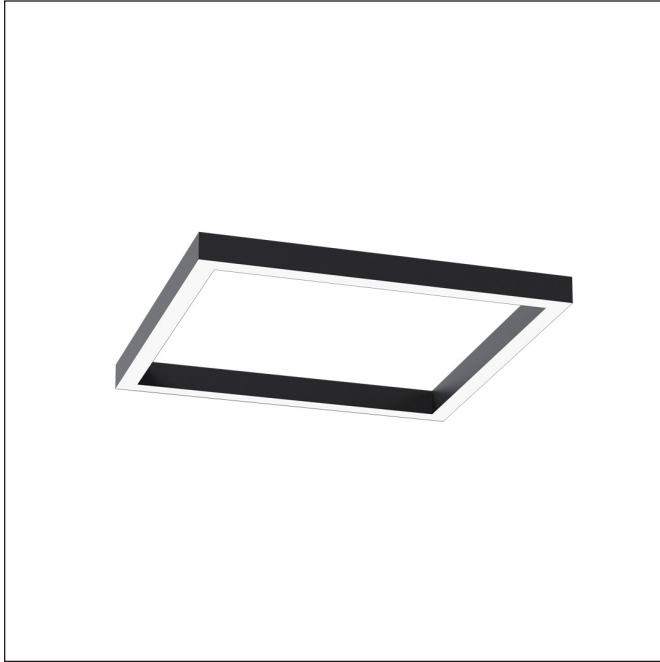


Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
58W	6224 lm	6622 lm
84W	8581 lm	9129 lm



**910**  
(35.82")

03 White   06 Grey   **05 Black**   70 Anthracite



62 (2.44")  
46 (1.81")

## ORDERING INFO

L595034

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595034	<input type="radio"/> 58: 58W <input type="radio"/> 84: 84W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



**LEDOLOGY®**

A **Luminart** BRAND


WWW.LEDOLOGY.COM  
Last updated: 09/09/24

# LCQ™ 1190

CEILING

**TYPE:**

**PROJECT NAME:**

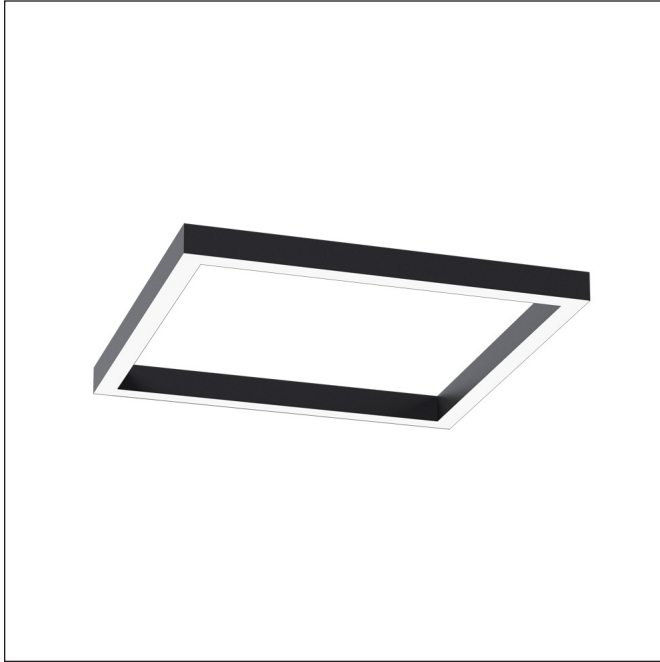

Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
76W	8299 lm	8829 lm
111W	11441 lm	12172 lm

1190  
(46.58")

03 White  
  06 Grey  
  05 Black  
  70 Anthracite

62 (2.44")

46  
(1.81")

## ORDERING INFO

L595035

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595035	<input type="radio"/> 76: 76W <input type="radio"/> 111: 111W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



**LEDOLOGY®**

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 09/09/24

# LCQ™ 1469

CEILING


**TYPE:**

**PROJECT NAME:**




Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
94W	10374 lm	11036 lm
138W	14302 lm	15215 lm



1469  
(57.83")

03 White  
  06 Grey  
  05 Black  
  70 Anthracite



62 (2.44")

46  
(1.81")

## ORDERING INFO

L595036

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595036	<input type="radio"/> 94: 94W <input type="radio"/> 138: 138W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



**LEDOLOGY®**

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 09/09/24