


# LCT™ 680

CEILING


**TYPE:**

**PROJECT NAME:**

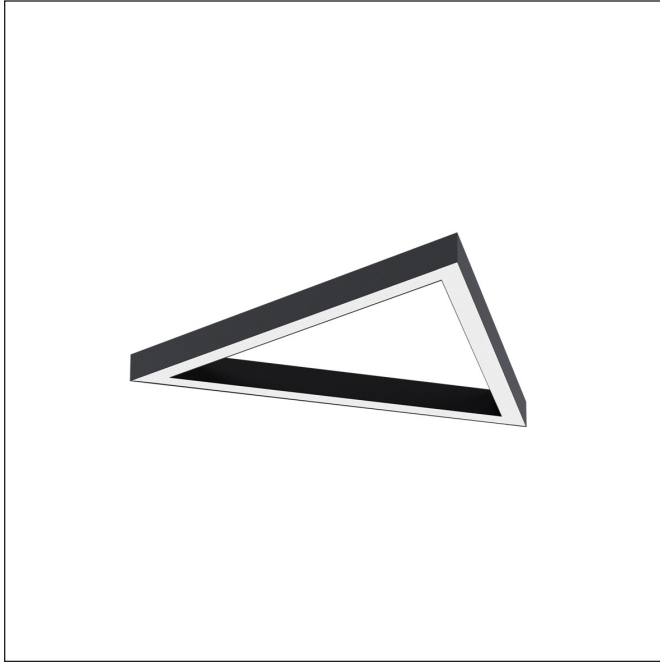

Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
29W	3112 lm	3311 lm
42W	4290 lm	4564 lm

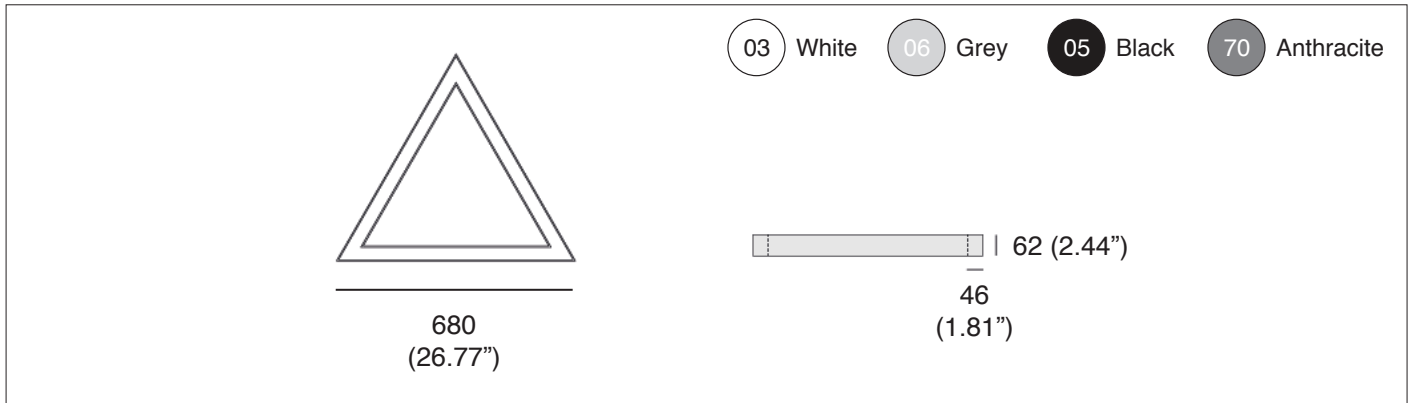

## ORDERING INFO

L595049

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595049	<input type="radio"/> 29: 29W <input type="radio"/> 42: 42W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



**LEDOLOGY®**

A **Luminart** BRAND


WWW.LEDOLOGY.COM  
Last updated: 09/09/24

# LCT™ 960

CEILING


TYPE:

PROJECT NAME:

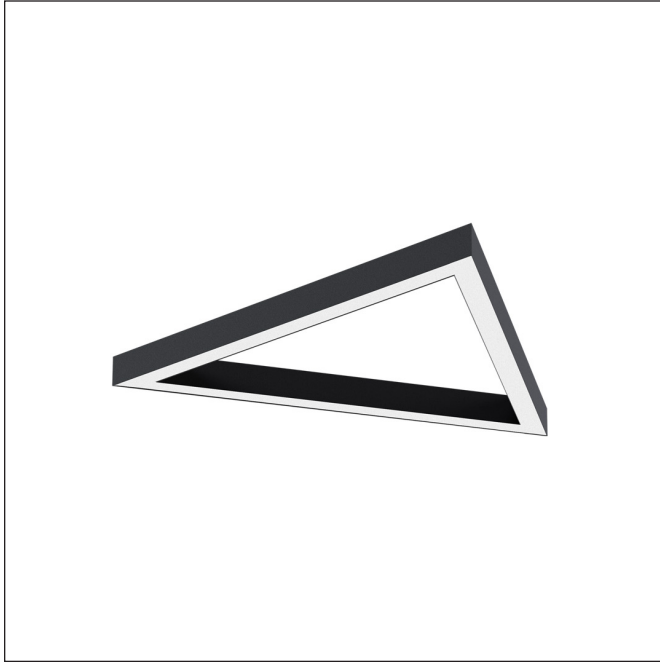

Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
43W	4668 lm	4966 lm
62W	6436 lm	6847 lm

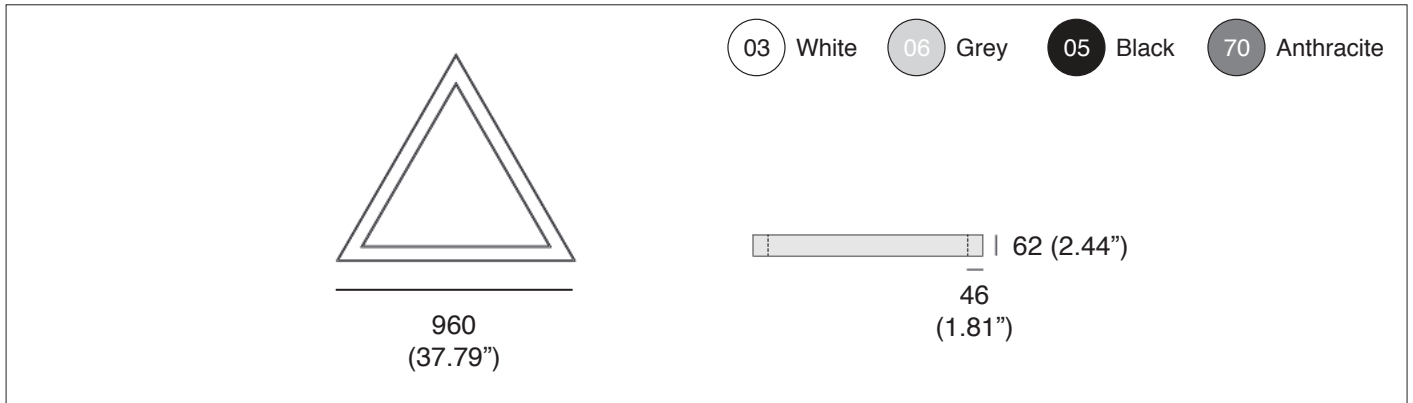

## ORDERING INFO

L595050

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595050	<input type="radio"/> 43: 43W <input type="radio"/> 62: 62W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input checked="" type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM  
Last updated: 09/09/24

# LCT™ 1240

CEILING


TYPE:

PROJECT NAME:

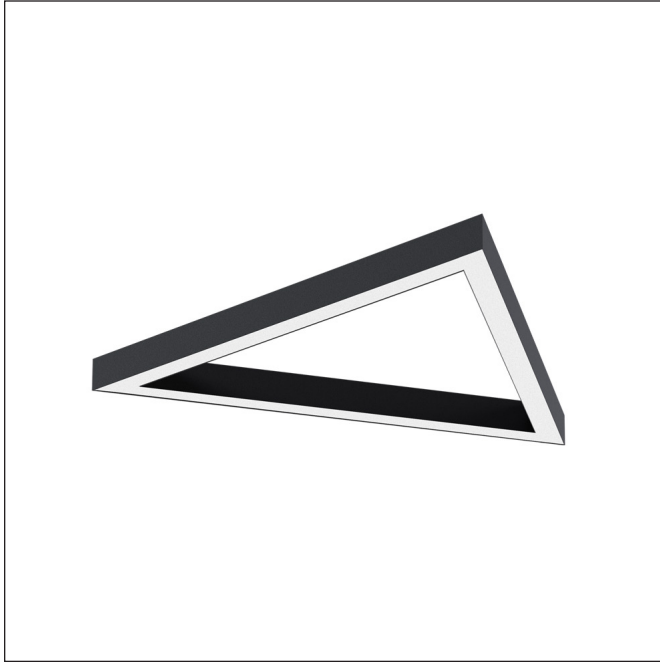

Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
56W	6224 lm	6622 lm
82W	8581 lm	9129 lm

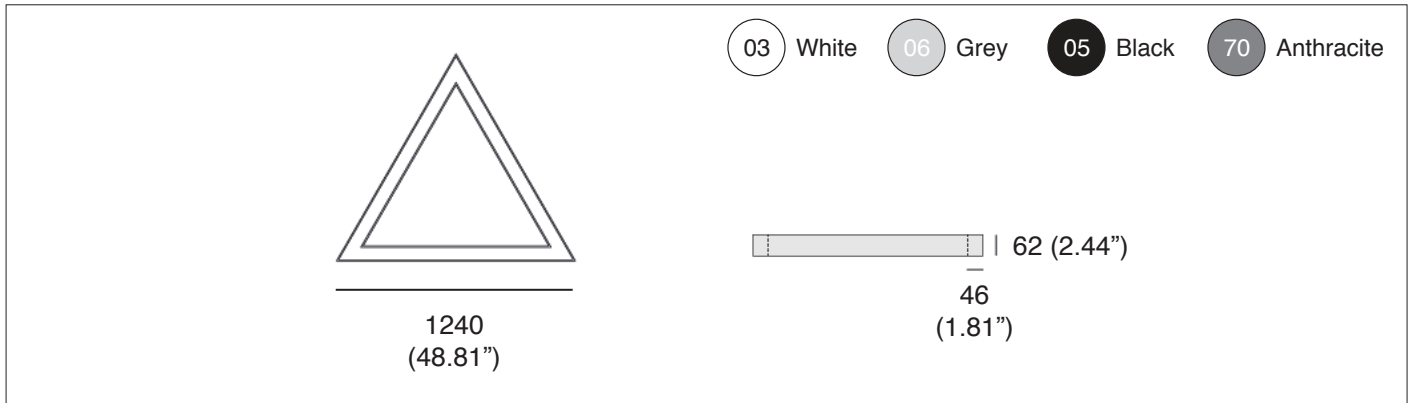

## ORDERING INFO

L595051

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595051	<input type="radio"/> 56: 56W <input type="radio"/> 82: 82W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM  
Last updated: 09/09/24

# LCT™ 1520

CEILING


TYPE:

PROJECT NAME:

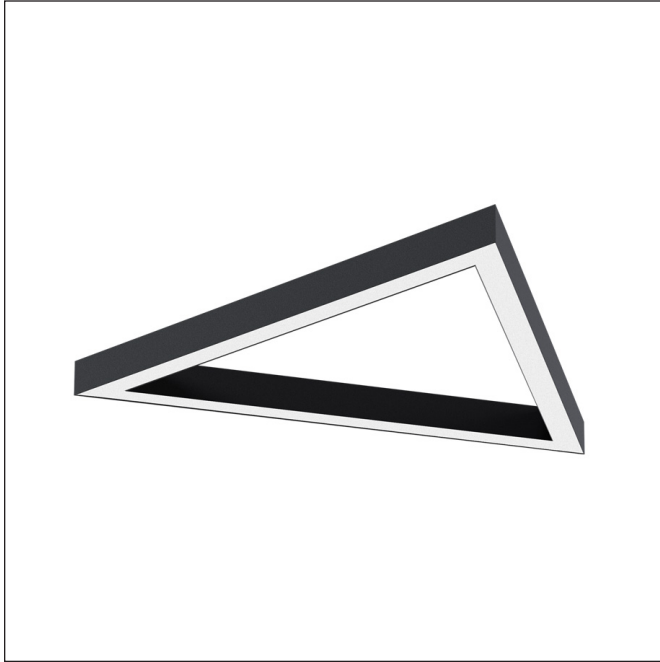

Mounting	Surface mounted with included brackets. Installs on a standard 4" junction box.
Material	Aluminum body, opal diffuser
LED	3000K, 4000K
Ingress Protection	IP20
CRI	>80
Class	I
Lifetime	100.000h L80B10

Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
70W	7780 lm	8277 lm
103W	10727 lm	11411 lm

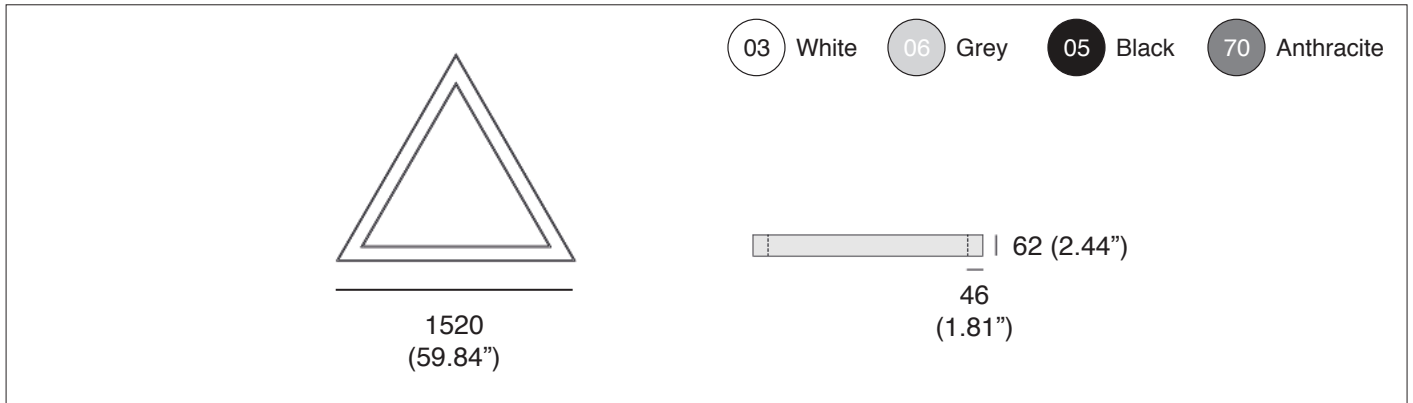

## ORDERING INFO

L595052

Model (Order Code)	Power	Finish Options	LED	Dimming Options
<input type="radio"/> L595052	<input type="radio"/> 70: 70W <input type="radio"/> 103: 103W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 09/09/24