

LD 200™

WALL


TYPE:

PROJECT NAME:



Power [W]	Luminaire Light Flux [lm]	
	3000K	4000K
5W	526lm	548lm
10W	975lm	1016lm
15W	1378lm	1436lm

Mounting	Wall mounted. Install on a standard 4" junction box
Material	Aluminum body, PMMA optic
LED	3000K, 4000K
Dimmer	LTE / 0-10V
Ingress Protection	IP65
CRI	>80
Class	I
Lifetime	100.000h L80B10

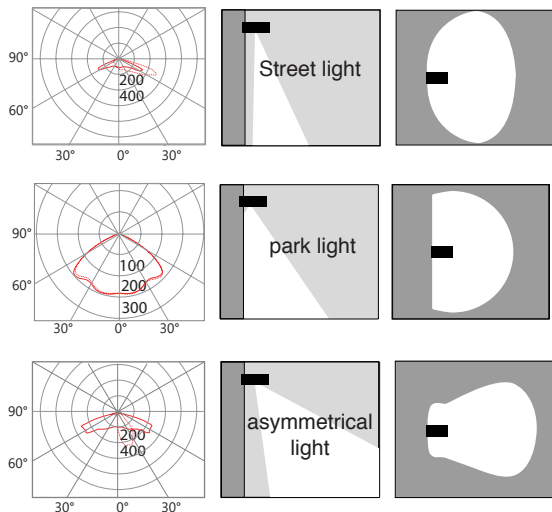

ORDERING INFO

L599194

Model (Order Code)	Power	Finish Options	Optic Options	LED	Dimming Options
<input type="radio"/> L599314	<input type="radio"/> 1: 5W <input type="radio"/> 2: 10W <input type="radio"/> 3: 15W	<input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite	<input type="radio"/> 1: Street light <input type="radio"/> 2: Park light <input type="radio"/> 3: Asymmetrical light	<input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V

SPECIFICATION SHEET



LEDODOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 10/22/24