


LWX™ 1001


WALL

TYPE:

PROJECT NAME:

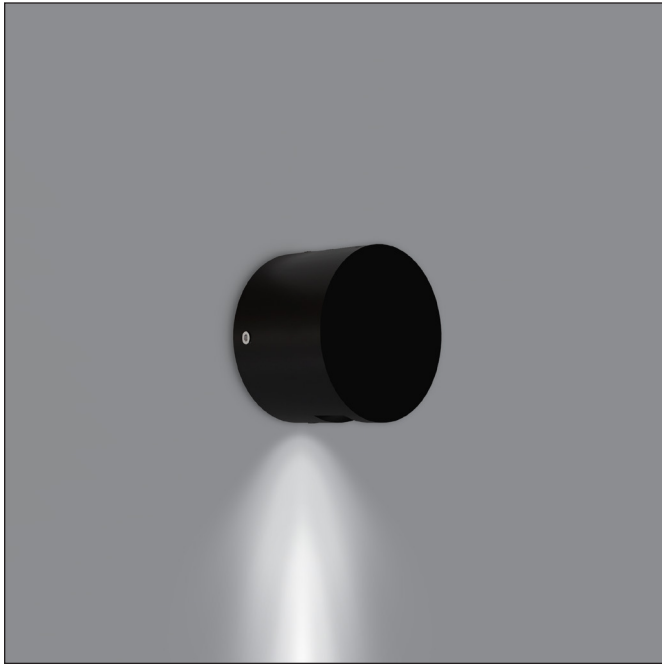

| | |
|--------------------|--|
| Light Source | LED, 1 direction, down |
| Mounting | Wall mounted using wall brackets and anchoring screws. |
| Material | Aluminum body |
| LED | 2700K, 3000K, 4000K |
| Dimmer | LTE / 0-10V |
| Ingress Protection | IP66 |
| CRI | >80 |
| Class | I |
| Lifetime | 100.000h L80B10 |

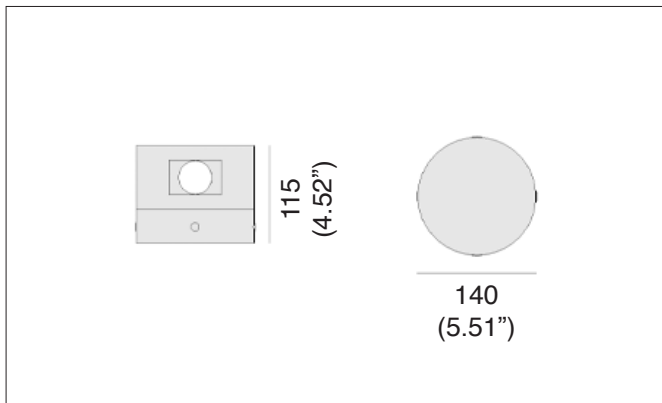

| Power [W] | Luminaire Light Flux [lm] | | |
|-----------|---------------------------|--------|--------|
| | 2700K | 3000K | 4000K |
| 2.5W | 187 lm | 194 lm | 202 lm |

- 03 White
- 06 Grey
- 05 Black
- 70 Anthracite

ORDERING INFO

| L599346 | 25 | | | |
|-------------------------------|--------------------------------|--|---|--|
| Model (Order Code) | Power | Finish Options | LED | Dimming Options |
| <input type="radio"/> L599346 | <input type="radio"/> 25: 2.5W | <input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite | <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K | <input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V |

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 09/06/24

LWX™ 1002



WALL

TYPE:

PROJECT NAME:

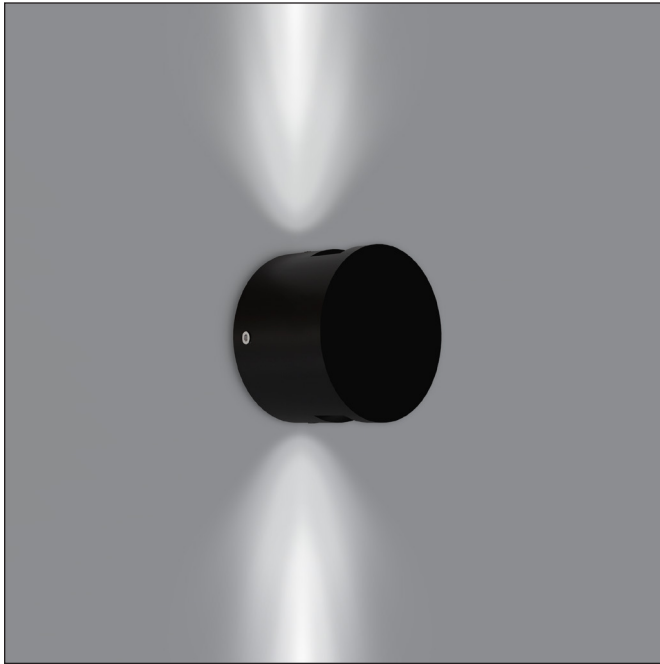

| | |
|--------------------|--|
| Light Source | LED, 2 directions, up & down |
| Mounting | Wall mounted using wall brackets and anchoring screws. |
| Material | Aluminum body |
| LED | 2700K, 3000K, 4000K |
| Dimmer | LTE / 0-10V |
| Ingress Protection | IP66 |
| CRI | >80 |
| Class | I |
| Lifetime | 100.000h L80B10 |

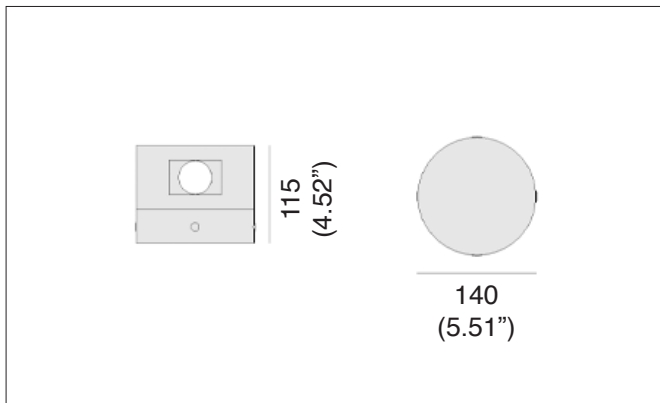

| Power [W] | Luminaire Light Flux [lm] | | |
|-----------|---------------------------|--------|--------|
| | 2700K | 3000K | 4000K |
| 4W | 373 lm | 388 lm | 405 lm |

- 03 White
 06 Grey
 05 Black
 70 Anthracite

ORDERING INFO

| L599347 | - | 4 | - | - |
|-------------------------------|-----------------------------|--|---|--|
| Model (Order Code) | Power | Finish Options | LED | Dimming Options |
| <input type="radio"/> L599347 | <input type="radio"/> 4: 4W | <input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite | <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K | <input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V |

SPECIFICATION SHEET



LEDODOLOGY®

A **Luminart** BRAND


WWW.LEODOLOGY.COM
Last updated: 09/06/24

LWX™ 1002L



WALL

TYPE:

PROJECT NAME:

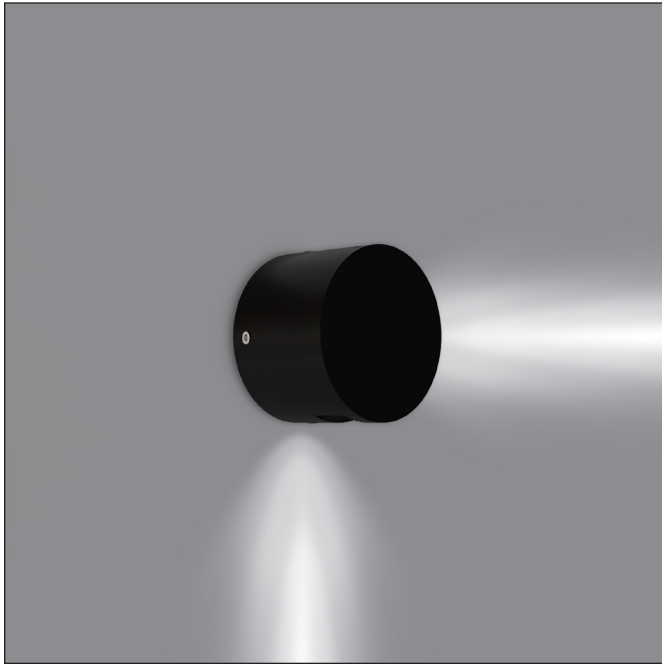

| | |
|--------------------|--|
| Light Source | LED, 2 directions, side & down |
| Mounting | Wall mounted using wall brackets and anchoring screws. |
| Material | Aluminum body |
| LED | 2700K, 3000K, 4000K |
| Dimmer | LTE / 0-10V |
| Ingress Protection | IP66 |
| CRI | >80 |
| Class | I |
| Lifetime | 100.000h L80B10 |

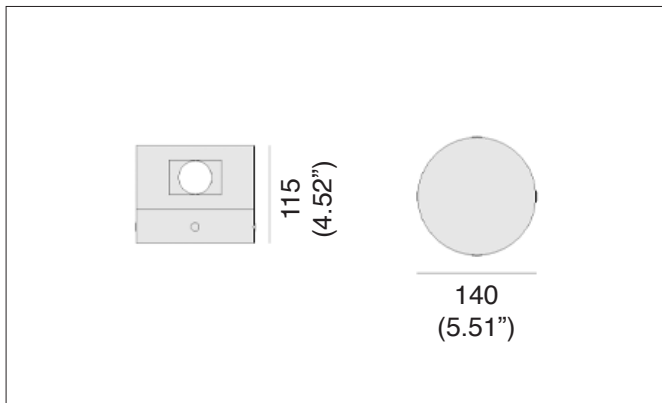

| Power [W] | Luminaire Light Flux [lm] | | |
|-----------|---------------------------|--------|--------|
| | 2700K | 3000K | 4000K |
| 4W | 373 lm | 388 lm | 405 lm |

- 03 White
- 06 Grey
- 05 Black
- 70 Anthracite

ORDERING INFO

| L599350 | - | 4 | - | - |
|-------------------------------|-----------------------------|--|---|--|
| Model (Order Code) | Power | Finish Options | LED | Dimming Options |
| <input type="radio"/> L599350 | <input type="radio"/> 4: 4W | <input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite | <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K | <input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V |

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 09/06/24

LWX™ 1003



WALL

TYPE:

PROJECT NAME:

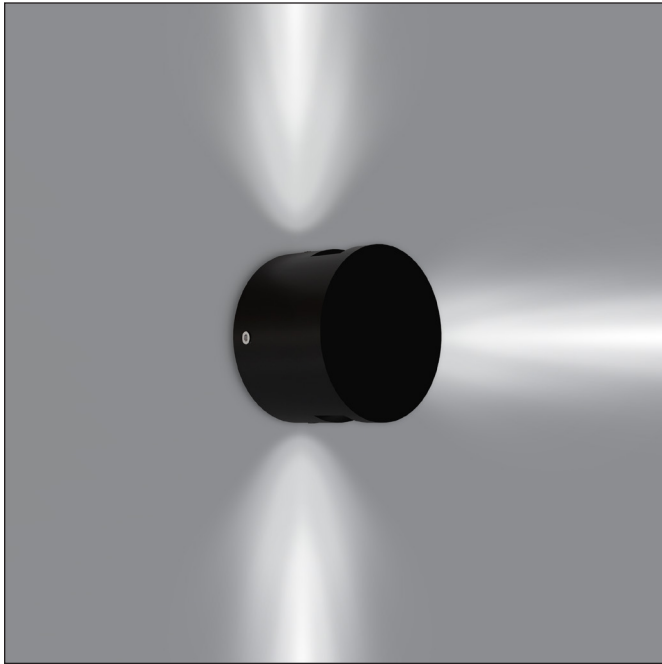

| | |
|--------------------|--|
| Light Source | LED, 3 directions, one side, up and down |
| Mounting | Wall mounted using wall brackets and anchoring screws. |
| Material | Aluminum body |
| LED | 2700K, 3000K, 4000K |
| Dimmer | LTE / 0-10V |
| Ingress Protection | IP66 |
| CRI | >80 |
| Class | I |
| Lifetime | 100.000h L80B10 |

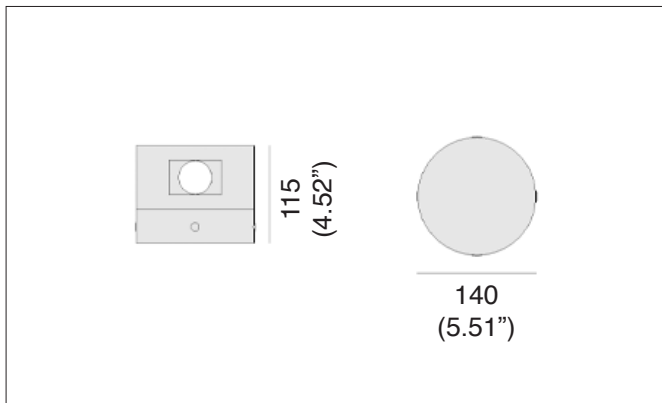

| Power [W] | Luminaire Light Flux [lm] | | |
|-----------|---------------------------|--------|--------|
| | 2700K | 3000K | 4000K |
| 5.5W | 560 lm | 583 lm | 607 lm |

- 03 White
- 06 Grey
- 05 Black
- 70 Anthracite

ORDERING INFO

| Model (Order Code) | Power | Finish Options | LED | Dimming Options |
|-------------------------------|--------------------------------|--|---|--|
| <input type="radio"/> L599348 | <input type="radio"/> 55: 5.5W | <input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite | <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K | <input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V |

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 09/06/24

LWX™ 1004



WALL

TYPE:

PROJECT NAME:

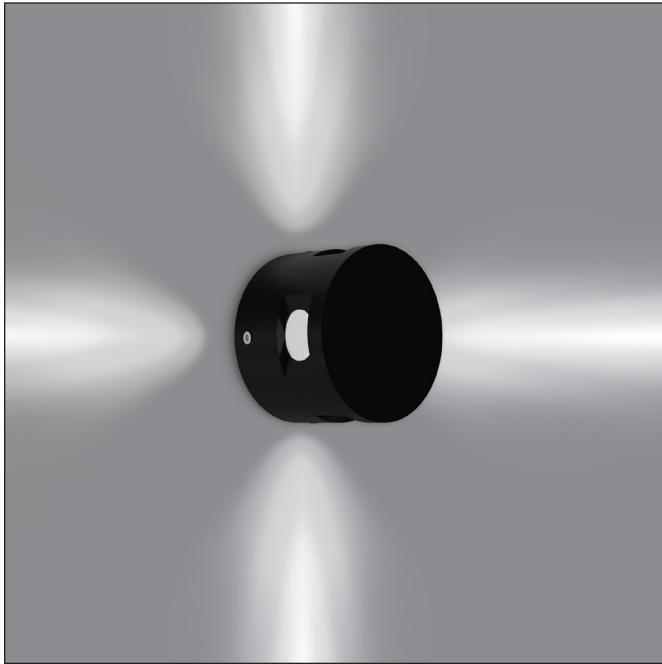

| | |
|--------------------|--|
| Light Source | LED, 4 directions, two sides, up and down |
| Mounting | Wall mounted using wall brackets and anchoring screws. |
| Material | Aluminum body |
| LED | 2700K, 3000K, 4000K |
| Dimmer | LTE / 0-10V |
| Ingress Protection | IP66 |
| CRI | >80 |
| Class | I |
| Lifetime | 100.000h L80B10 |

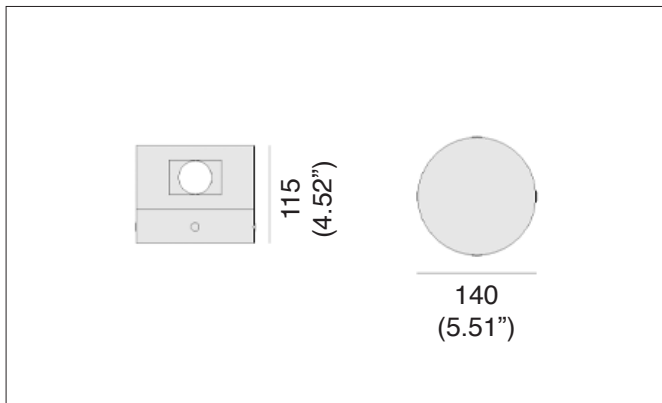

| Power [W] | Luminaire Light Flux [lm] | | |
|-----------|---------------------------|--------|--------|
| | 2700K | 3000K | 4000K |
| 7W | 746 lm | 777 lm | 810 lm |

- 03 White
- 06 Grey
- 05 Black
- 70 Anthracite

ORDERING INFO

| L599349 | - | 7 | - | - | - |
|-------------------------------|-----------------------------|--|---|--|---|
| Model (Order Code) | Power | Finish Options | LED | Dimming Options | |
| <input type="radio"/> L599349 | <input type="radio"/> 7: 7W | <input type="radio"/> 03: White <input type="radio"/> 06: Grey <input type="radio"/> 05: Black <input type="radio"/> 70: Anthracite | <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K | <input type="radio"/> LTE: 120V LTE <input type="radio"/> D10: 120-277V 0-10V | |

SPECIFICATION SHEET



LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 09/06/24