

**AT** CEILING/WALL LED SYSTEM  
WALL GRAZING & COVE EFFECT

**TYPE:**

**PROJECT NAME:**

Basic yet innovative profile which creates an asymmetrical beam, AT is a modular fixture for wall/ceiling or recess. It is made from extruded epoxy polyester powder coated aluminium and it is equipped with LED light sources. This fixture requires a remote driver (included) which, for maintenance purposes, must be placed in an inspection box at a distance of no more than 10 metres. Its degree of protection against the penetration of dust, solid objects and liquids is IP20.



SPECIFICATION SHEET

# AT CEILING/WALL LED SYSTEM


## WALL GRAZING & COVE EFFECT

**TYPE:**


**PROJECT NAME:**

CODE	W	Lm (3000K)
A6-647.100...*	12 (120 led)	1200
A6-648.100...*	25 (280 led)	2500
A6-028	End caps (pair)	
A6-029	In-line connector	
0800/DIM	Dimming kit	
0800/EM	Emergency kit with batteries	


\*code per meter (39.3701")





Multiples of 50mm(1.96"), max 4m(157.48")  
Cod. A6-647










Multiples of 30mm(1.18"), max 4m(157.48")  
Cod. A6-648

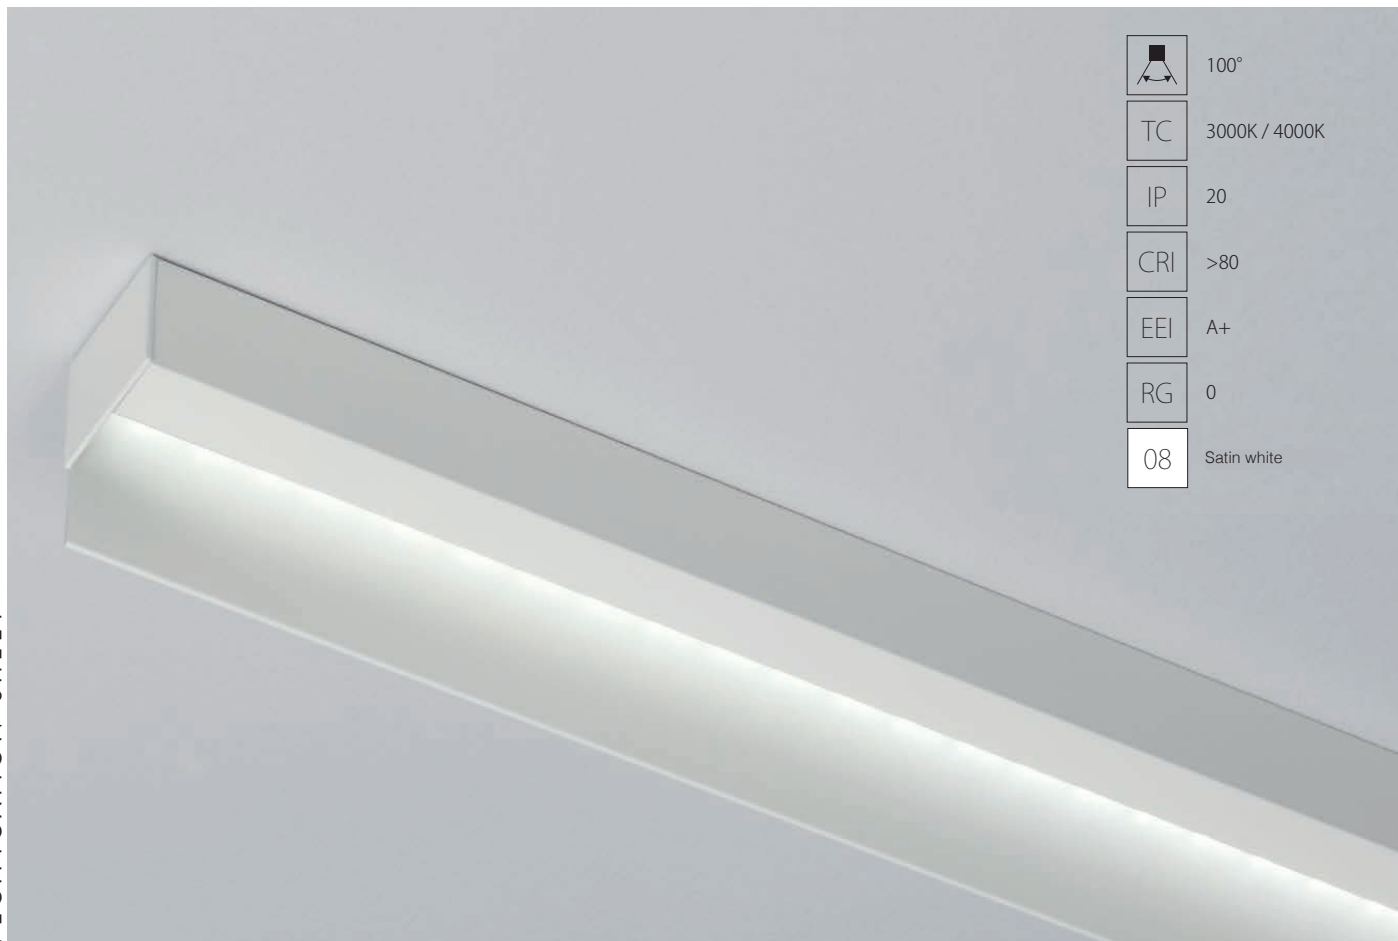

NOTICE: Add 12.4mm (0.48") to  
total length of composition



-  100°
-  TC 3000K / 4000K
-  IP 20
-  CRI >80
-  EEI A+
-  RG 0
-  08 Satin white

SPECIFICATION SHEET

**AT** CEILING/WALL LED SYSTEM  
WALL GRAZING & COVE EFFECT

**TYPE:**

**PROJECT NAME:**



SPECIFICATION SHEET

# AT SYSTEM

## INSTALLATION INSTRUCTIONS


TYPE:

PROJECT NAME:

### INSTALLATION

**A** - PLAN YOUR ANCHORING LAYOUT ON THE MOUNTING SURFACE.

**B** - FIX THE SUPPORT ANCHORS OR TOGGLE BOLTS (NOT INCLUDED) AT PLANNED LOCATION FOR FIXING FIXTURE TO CEILING

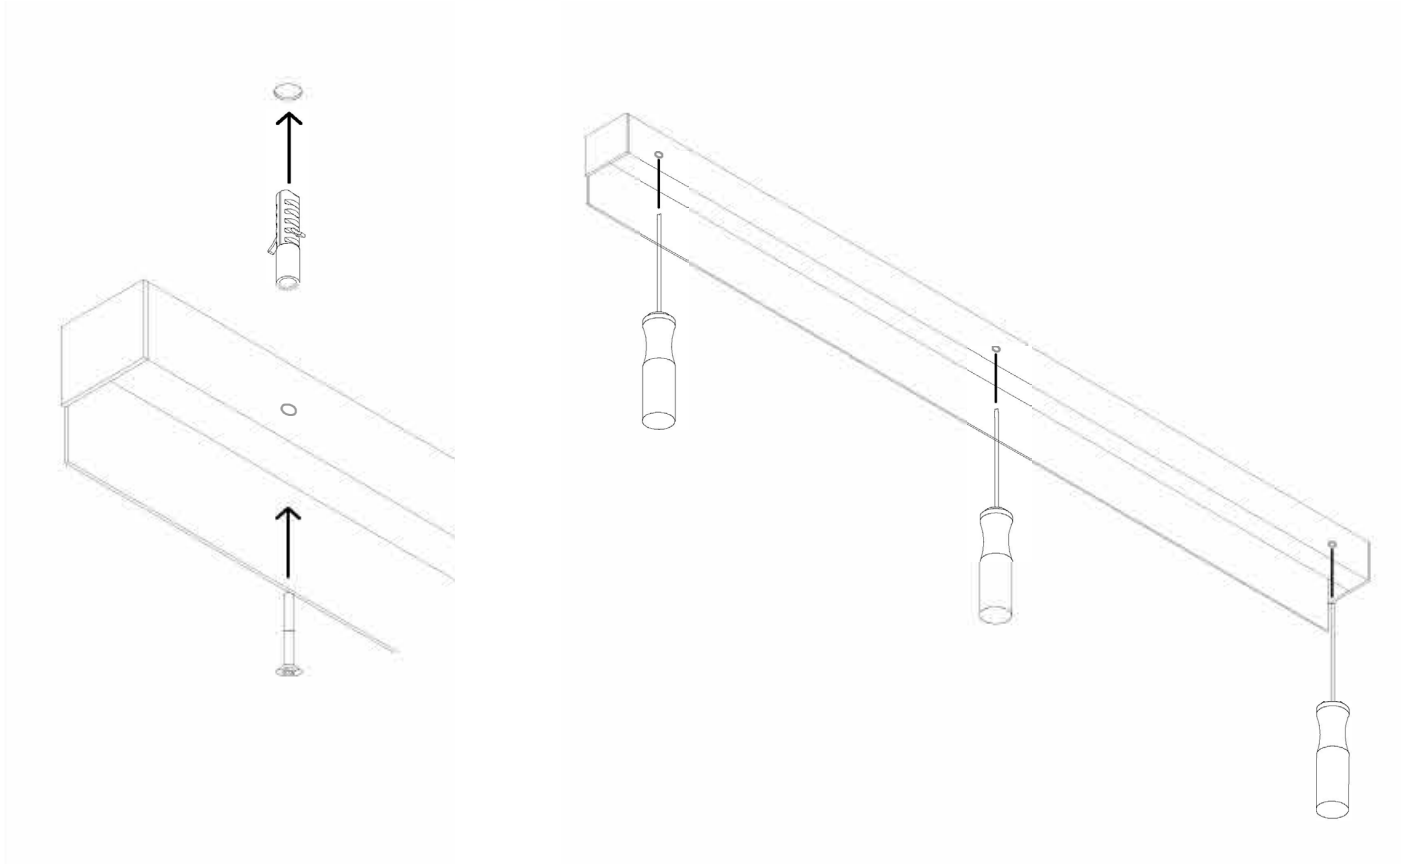


# AT SYSTEM

## INSTALLATION INSTRUCTIONS


TYPE:

PROJECT NAME:


C - DRILL 1/4" HOLE TO PASS WIRE THROUGH CEILING.

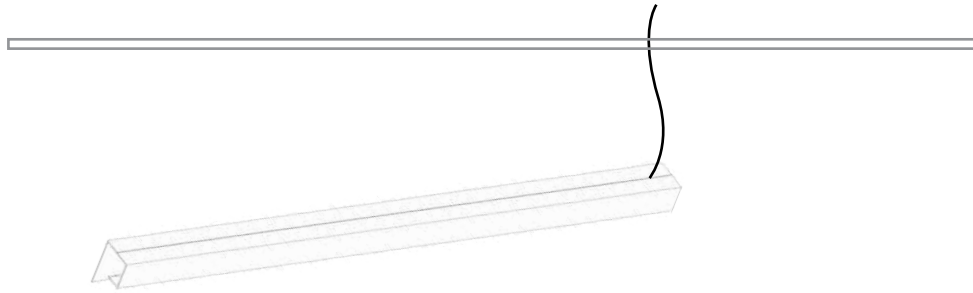

D - ATTACH FIXTURE TO CEILING WITH SCREWDRIVER

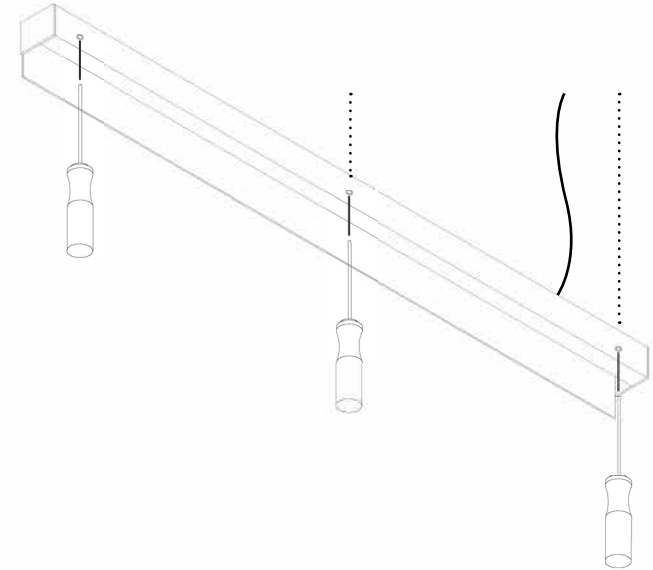

E - MAKE NECESSARY CONNECTIONS TO REMOTE POWER SUPPLY (24V DC).

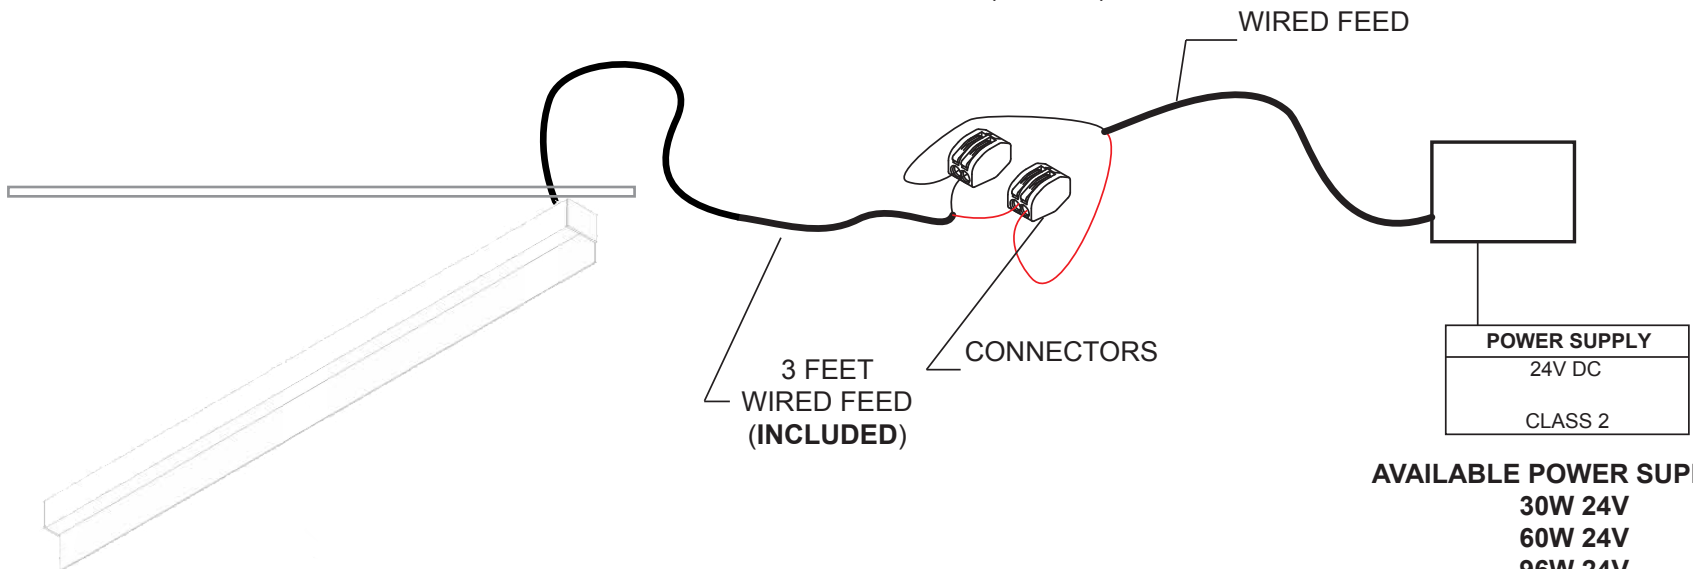

AVAILABLE POWER SUPPLIES:

30W 24V  
60W 24V  
96W 24V