


RINGER™



SP. 50 Direct Indirect LED

TYPE:

PROJECT NAME:

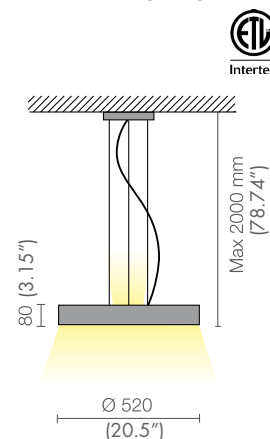MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------




L258692.30  LED 50W 3000K 2900+1500lm 700mA CRI>80 A  336/415

L258692.40  LED 50W 4000K 3300+1550lm 700mA CRI>80 A

SPECIFICATION SHEET

Double light hanging fixture complete with a high efficiency LED module, made from epoxy powder coated finish aluminium stabilized with UV rays. Super pure 99.9% aluminium reflector with a metallic or painted finish. The light source is positioned to provide discreet and effective light without glare. The unit includes driver. Provided with galvanised steel suspension cables (1.2 mm) with quick adjust regulators, 200 cm of four-wire electrical cable 4x0.75 mm² and a painted steel ceiling attachment. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

08  Bianco satinato RAL 9003
Frosted white RAL 9003

22  Grigio RAL 9006
Grey RAL 9006

Included: driver.
Photobiological risk group 1,
in compliance with Standard EN 62471

VOLTAGE ☐ 120V ☐ 220V ☐ 277V

LEDOLOGY®

WWW.LUMINARTLIGHTING.COM

RINGER™

SP. 40 Direct LED

TYPE:

PROJECT NAME:

MODEL #


FINISH

LED COLOR

OPTIC

DRIVER

VOLTAGE

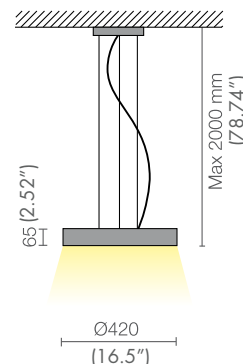

L258689.30 LED 20W 3000K 2000lm 700mA CRI>80 A+ 147/412

L258689.40 LED 20W 4000K 2200lm 700mA CRI>80 A+

L258689.30/DIMM2 LED 20W 3000K 2000lm 700mA CRI>80 A+ 147/412

L258689.40/DIMM2 LED 20W 4000K 2200lm 700mA CRI>80 A+

Hanging lamp for direct light with a high efficiency LED module, made from epoxy powder coated finish aluminium stabilized with UV rays. Super pure 99.9% aluminium reflector with a metallic or painted finish. The light source is positioned to provide discreet and effective light without glare. The unit includes driver. Provided with galvanised steel suspension cables (1.2 mm) with quick adjust regulators, 200 cm of three-wire electrical cable 3x1 mm2 and a painted steel ceiling attachment. The degree of protection against the penetration of dust, solid objects and liquids is IP20.

08 Bianco satinato RAL 9003
Frosted white RAL 9003

22 Grigio RAL 9006
Grey RAL 9006

VOLTAGE

☐ 120V

☐ 220V

☐ 277V

SPECIFICATION SHEET

LEDOLOGY

WWW.LUMINARTLIGHTING.COM