

CIRCUS™

ACOUSTIC SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET



Diffused light suspension fixture. Curved aluminum structure in matte black, white or painted gold.
Built-in flexible LED strip and opal PMMA diffuser. Metal ceiling canopy in matte white, black or painted gold.

LEDOLOGY®



A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 11/07/24

Circus Ø100 Downlight

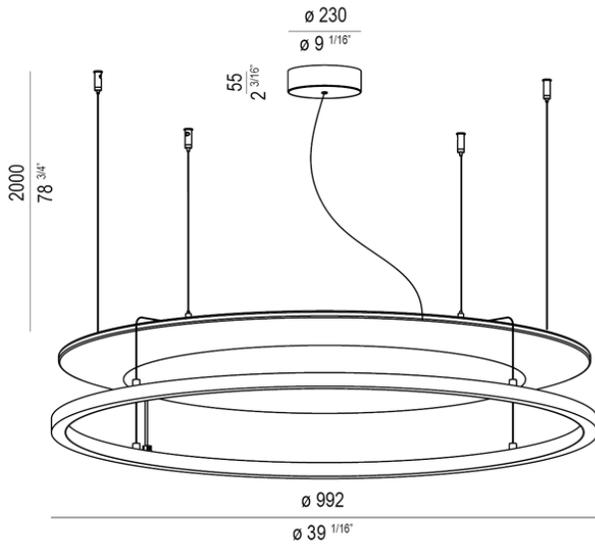

Circus Ø150 Downlight

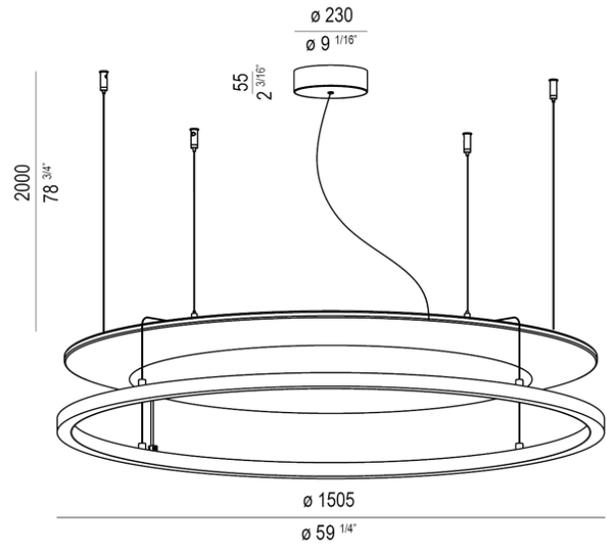

Model: L03S100DI

Description: Diffused light hanging luminaire for architectural lighting and acoustic control.

Application: Architectural indoor lighting

Materials: Aluminum structure, Opal PMMA diffuser

Structure Finishes: Matte black, matte white, painted gold

Acoustic Panel: Honeycomb polycarbonate acoustic panel with a removable cover in 100% polyester

Acoustic Fabric: See page 4

Light source: LED 74W, 24V, 10360 Lm. Downward emission. 80CRI. IP20.

Light control: Dimmable with 0-10V or TRIAC dimming

Model: L03S150DI

Description: Diffused light hanging luminaire for architectural lighting and acoustic control.

Application: Architectural indoor lighting

Materials: Aluminum structure, Opal PMMA diffuser

Structure Finishes: Matte black, matte white, painted gold

Acoustic Panel: Honeycomb polycarbonate acoustic panel with a removable cover in 100% polyester

Acoustic Fabric: See page 4

Light source: LED 108W, 24V, 15120 Lm. Downward emission. 80 CRI. IP20.

Light control: Dimmable with 0-10V or TRIAC dimming

ORDERING INFO

Model (Order Code)	Structure Finish	Acoustic Fabric	LED	Driver Options
	<input type="radio"/> Matte Black <input type="radio"/> Matte White <input type="radio"/> Painted Gold	See page 4	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming




CIRCUS™

ACOUSTIC SUSPENSION




TYPE:

PROJECT NAME:

Circus Ø100 Uplight+Downlight

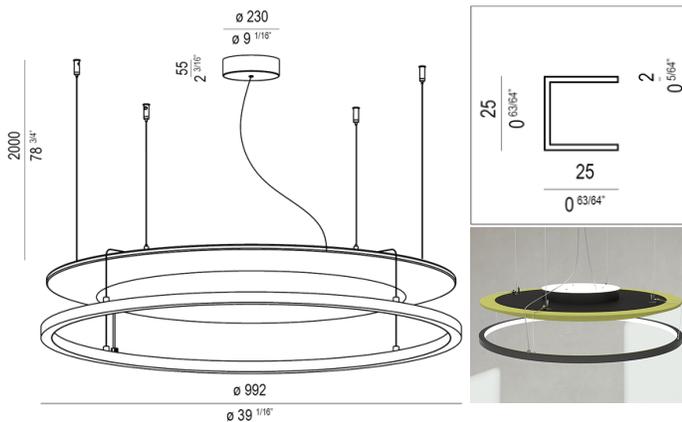

Circus Ø150 Uplight+Downlight

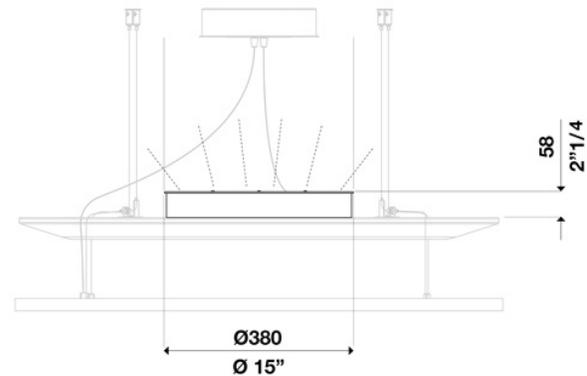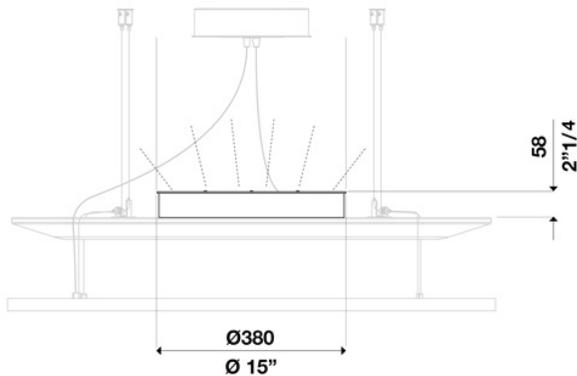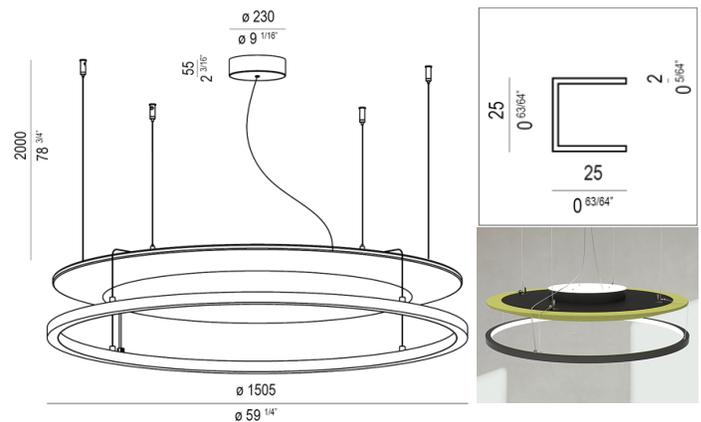

Model: L03S100INDI

Description: Diffused light hanging luminaire for architectural lighting and acoustic control.

Application: Architectural indoor lighting

Materials: Aluminum structure, Opal PMMA diffuser

Structure Finishes: Matte black, matte white, painted gold

Acoustic Panel: Honeycomb polycarbonate acoustic panel with a removable cover in 100% polyester

Acoustic Fabric: See page 4

Light source: LED (74W down, 17W up), 24V, (10360 Lm down, 2240 Lm up). Downward+Upward emission. (80CRI down, 90CRI up). IP20.

Light control: Dimmable with 0-10V or TRIAC dimming

Model: L03S150INDI

Description: Diffused light hanging luminaire for architectural lighting and acoustic control.

Application: Architectural indoor lighting

Materials: Aluminum structure, Opal PMMA diffuser

Structure Finishes: Matte black, matte white, painted gold

Acoustic Panel: Honeycomb polycarbonate acoustic panel with a removable cover in 100% polyester

Acoustic Fabric: See page 4

Light source: LED (108W down, 17W up), 24V, (15120 Lm down, 2240 Lm up). Downward+Upward emission. (80CRI down, 90CRI up). IP20.

Light control: Dimmable with 0-10V or TRIAC dimming


SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Acoustic Fabric	LED	Driver Options
	<input type="radio"/> Matte Black <input type="radio"/> Matte White <input type="radio"/> Painted Gold	See page 4	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



Acoustic Panel Fabric Color Options

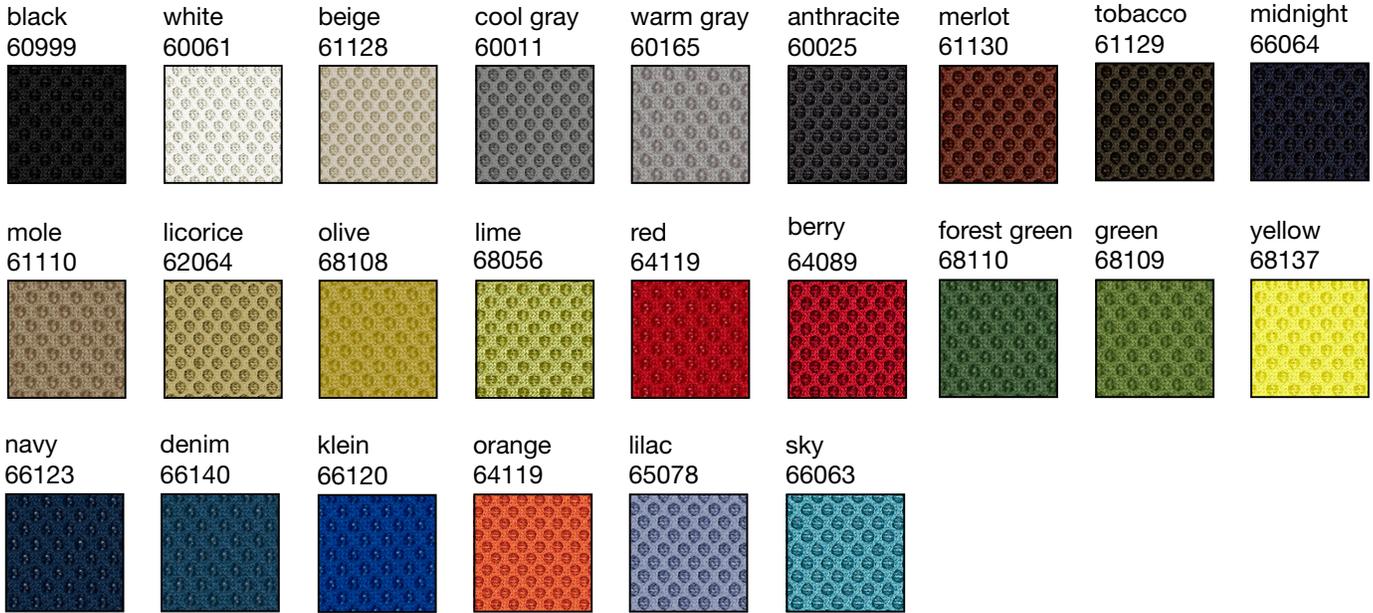

Single Fabric Color Option

Choose only one finish




Fabric ① S + # _____

OR

Mix Fabric Color Option

Choose up to four finishes

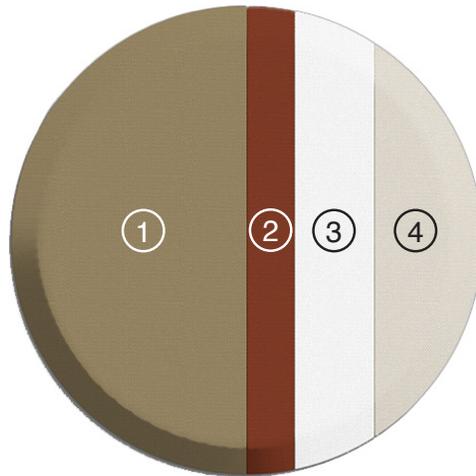

Fabric ① MX + # _____

Fabric ② + # _____

Fabric ③ + # _____

Fabric ④ + # _____

