EVER AND EVERTM

TYPE:

ACOUSTICAL SUSPENSION

PROJECT NAME:



Model	Length	Direct	Indirect	LED	Body Finish	Acoustical	Panel	Voltage/Dim
OL4500DI (Direct Only)	○ 02: 2' ○ 04: 4'			○30K (3000K)	○ 01: White ○ 02: Black	Panel See page 4	Fabric See page 5-8	○120V LTE Dim
OL4500DIIN (Direct + Indirect)	○ 06: 6' ○ 08: 8'		○ 10W/FT ○ Empty	○35K (3500K)	○ 10: Grey			○ 120V 0-10V Dir
○ L4500IN (Indirect Only)	○ 16: 16' ○ 24: 24'			○40K (4000K)				○ 277V 0-10V Dir

SPECIFICATIONS

Design

Slim profile pendant luminaire provides direct and or indirect lighting. Available as single modules or continous runs suitable for interior application where general lighting is required.

Construction

Body: Extruded aluminum profile with die-cast end caps. Diffuser: PMMA frosted acrylic.

Mounting: Stainless steel suspension cable, clear power cable and die-cast canopy.

Light Source

High efficiency Osram Duris®E5 JDSR (LM-80 tested) 3000K /3500K /4000K 85 cri typical (min>80CRI). Lumen maintenance: 70% of initial lumens at 100 000 hours (L70).

Optics

Е

SHE

Z

ECIFICATIO

General lighting optics.

Electrical

High efficiency electronic power supply, rated 100 000 hours 120-277V. Luminaire is supplied standard with 2 circuits (except for 2ft unit)

Dimming

Optional power supply compatible with 0-10V, Hi-lume® BUS supply dimming. Supplied standard with 1 circuit only, but 2 circuits available upon request, with additional canopy.

Mounting

5' field adjustable suspension cable, to be Installed on a standard 4" junction box.

Finish

White RAL9003, black RAL9004 or gray RAL9006 The canopy is supplied white, other finishes available on demand.




WWW.LEDOLOGY.COM Last updated: 1/27/21

EVER AND EVERTM

TYPE:

ACOUSTICAL SUSPENSION


PROJECT NAME:

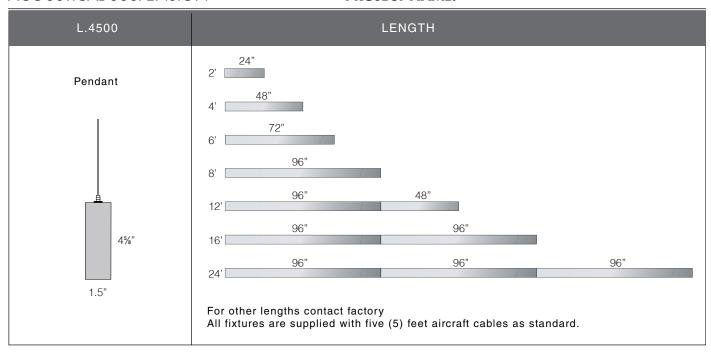

INDIRECT OUTPUT

	LOAD	30	000K
	W/ft	lm/ft	lm/W
Base output (BO)	5	510	102
Medium output (MO)	7.5	710	94
High output (HO)	10.5	935	89

3000K

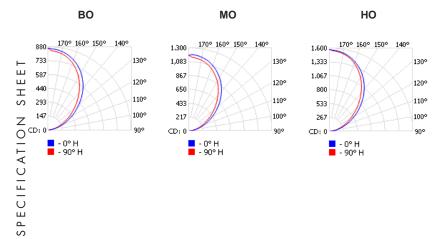

MULTIPLIER TABLE

Color options	Multiplier
3000K - 85CRI	1
3500K - 85CRI	1,09
4000K - 85CRI	1,19

LEDOLOGY®

ACCESSORIES AND MISCELLANEOUS OPTIONS

ACCESSORIES (TO BE ORDERED SEPARATELY)

*for installation consult the instruction sheet

3637 - Accessory for T-Bar Mounting (White)
Kits of two anchors

Length	# Of kits needed
Up to 8'	1
8' to 24'	2
25' to 40'	3
41' to 56'	4
57' to 72'	5
73' to 88'	6
89' to 104'	7

INSTALLATION OPTIONS (INCLUDED)

Default option



The aircraft cable suspension and clear power cable terminate at the canopy.

Alternate option



The aircraft cable suspension terminates in the ceiling while the clear power cable and the canopy cover can be located independently

Frosted Diffuser

Made of extruded PMMA acrylic with a proprietary frosting technique. The frosted diffuser is intended to be used in Direct, Indirect or Direct/Indirect lighting distributions for both the Pendant and Ever & Ever wall to ensure the desired halo lighting effect.



EVER AND EVERTM

ACOUSTICAL SUSPENSION


TYPE:


PROJECT NAME:


Acoustical Panel Options Squares

	~	~	~
MODEL	LP5-S-60.60	LP5-S-80.80	LP5-S-120.120
CM	60x60x5	80x80x5	120x120x5
INCHES	23.6x23.6x2	31.5x31.5x2	47.2x47.2x2


Rectangles









further shapes, sizes and thickness available on request







SPECIFICATION SHEET

ACOUSTICAL SUSPENSION

TYPE:

PROJECT NAME:

Fabric Options: "Trevira CS" Palette (100% Polyester)



Fabric Options: "ECOfelt" Palette (90% Wool, 10% Polyester)



Fabric Options: "PETfelt" Palette (100% PET (polyethylene terephthalate))



ACOUSTICAL SUSPENSION

Fabric Options: "Tweed" Palette (75% Wool, 25% Polyamide)

