

EVER AND EVER™ V2

V2 SERIES SUSPENSION

TYPE:

PROJECT NAME:



ORDERING INFO

| Model | Length | Direct | Indirect | LED | Body Finish | Diffuser | Dimming | Voltage |
|--------------------------------|-----------|----------|----------|------------------|----------------------------|-------------------|---|------------------|
| ○ L4500V2DI (Direct Only) | ○ 02: 2' | ○ 5W/FT | ○ 5W/FT | ○ 30K (3000K) | ○ 01: White ○ 02: Black | ○ FD (Frosted) | ○ LTE (Leading/ Trailing Edge Dim) | ○ 120V ○ 277V |
| | ○ 04: 4' | ○ 7W/FT | ○ 7W/FT | | | | | |
| ○ L4500V2IN (Indirect Only) | ○ 06: 6' | ○ 10W/FT | ○ 10W/FT | ○ 35K (3500K) | ○ 10: Grey | | | |
| | ○ 08: 8' | ○ Empty | ○ Empty | | | | | |
| | ○ 16: 16' | | | ○ 40K (4000K) | | | | |
| | ○ 24: 24' | | | | | | | |

SPECIFICATIONS

Design

Slim profile pendant luminaire provides direct or indirect lighting. Available as single modules or continuous runs suitable for interior application where general lighting is required.

Construction

Body: Extruded aluminum profile with die-cast end caps. Diffuser: PMMA frosted acrylic.
Mounting: Stainless steel suspension cable, clear power cable and die-cast canopy.

Light Source

High efficiency Osram Duris®E5 JDSR (LM-80 tested) 3000K /3500K /4000K 85 cri typical (min>80CRI). Lumen maintenance: 70% of initial lumens at 100 000 hours (L70).

Optics

General lighting optics.

Electrical

High efficiency electronic power supply, rated 100 000 hours 120-277V. Luminaire is supplied standard with 2 circuits (except for 2ft unit)

Dimming

Optional power supply compatible with 0-10V, Hi-lume® BUS supply dimming. Supplied standard with 1 circuit only, but 2 circuits available upon request, with additional canopy.

Mounting

5' field adjustable suspension cable, to be installed on a standard 4" junction box.

Finish

White RAL9003, black RAL9004 or gray RAL9006 The canopy is supplied white, other finishes available on demand.

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM


Last updated: 4/27/20

EVER AND EVER™ V2

V2 SERIES SUSPENSION

TYPE:

PROJECT NAME:

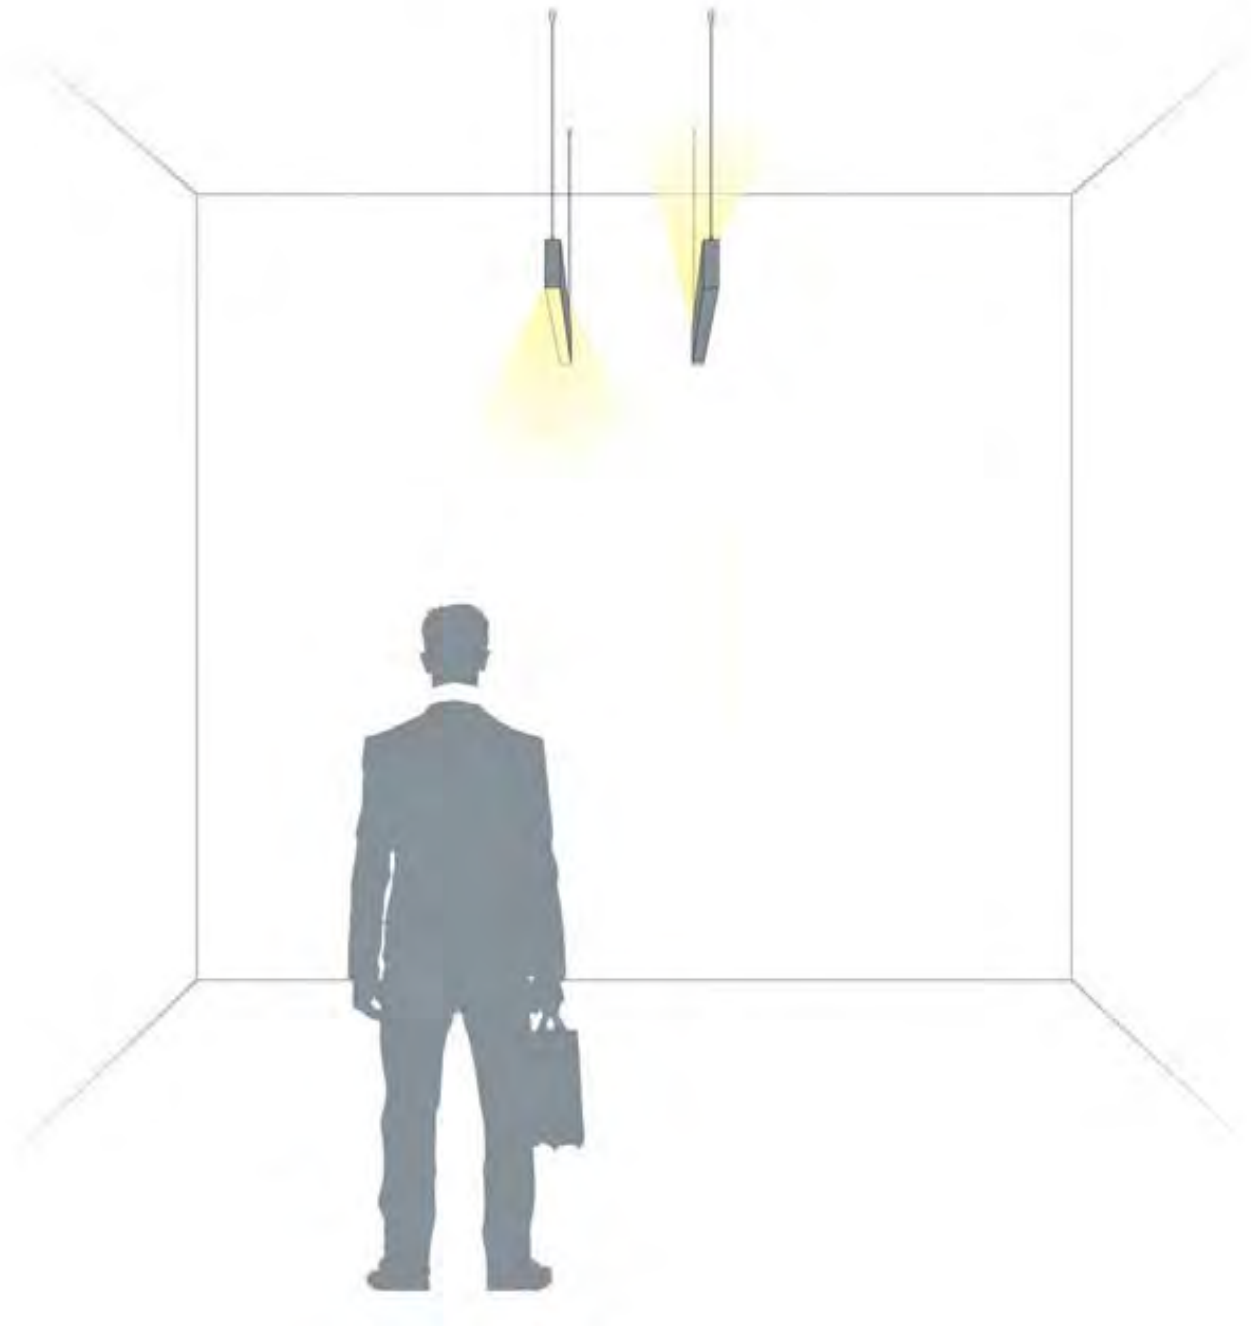

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 4/27/20

EVER AND EVER™ V2

TYPE:

V2 SERIES SUSPENSION

PROJECT NAME:

| L.4500V2 | LENGTH |
|--|---|
| <p>Pendant</p> <p>1.5"</p> <p>3.5"</p> | <p>2' 24"</p> <p>4' 48"</p> <p>6' 72"</p> <p>8' 96"</p> <p>12' 96" 48"</p> <p>16' 96" 96"</p> <p>24' 96" 96" 96"</p> <p>For other lengths contact factory All fixtures are supplied with five (5) feet aircraft cables as standard.</p> |

LIGHT OUTPUT DATA




| | LOAD | 3000K | |
|--------------------|---------|-------|------|
| | W/ft | lm/ft | lm/W |
| 5W (Base output) | 5 W/ft | 510 | 102 |
| 7W (Medium output) | 7 W/ft | 710 | 94 |
| 10W (High output) | 10 W/ft | 935 | 89 |

3000K

5W

7W

10W



MULTIPLIER TABLE

| Color options | Multiplier |
|---------------|------------|
| 3000K - 85CRI | 1 |
| 3500K - 85CRI | 1,09 |
| 4000K - 85CRI | 1,19 |

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 4/27/20

EVER AND EVER™ V2

V2 SERIES SUSPENSION

TYPE:

PROJECT NAME:

ACCESSORIES AND MISCELLANEOUS OPTIONS

ACCESSORIES (TO BE ORDERED SEPARATELY)

*for installation consult the instruction sheet

- 3637 - Accessory for T-Bar Mounting (White)
Kits of two anchors



| Length | # Of kits needed |
|-------------|------------------|
| Up to 8' | 1 |
| 8' to 24' | 2 |
| 25' to 40' | 3 |
| 41' to 56' | 4 |
| 57' to 72' | 5 |
| 73' to 88' | 6 |
| 89' to 104' | 7 |


INSTALLATION OPTIONS (INCLUDED)

Default option



The aircraft cable suspension and clear power cable terminate at the canopy.


Alternate option



The aircraft cable suspension terminates in the ceiling while the clear power cable and the canopy cover can be located independently.

- Frosted Diffuser

Made of extruded PMMA acrylic with a proprietary frosting technique. The frosted diffuser is intended to be used in Direct or Indirect lighting distributions to ensure the desired halo lighting effect.



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM

Last updated: 4/27/20





EVER AND EVER™ V2


V2 SERIES SUSPENSION

TYPE:


PROJECT NAME:

CUSTOM CONFIGURATION OPTIONS


| L.4500V2 | CONFIGURATION |
|--|---|
| Pendant  |  L: L Shape  Z: Z Shape  U: U Shape <p>For other layouts contact factory. All fixtures are supplied with five (5) foot aircraft cables as standard.</p> |











"L" : Configuration



"Z" : Configuration




"U" : Configuration

| L.4500V2 | CONFIGURATION |
|--|--|
| Pendant  |  4X4 : 4' X 4'  4X8 : 4' X 8'  4X12 : 4' X 12'  4X16 : 4' X 16'  8X8 : 8' X 8'  8X12 : 8' X 12'  8X16 : 8' X 16' <p>For other configuration contact factory. All fixtures are supplied with five (5) foot aircraft cables as standard.</p> |


• Angle

All angle specifications are supplied with the use of a very precise diecast joiner, ensuring a tight fit when creating L, Z, U, Rectangular and Square configurations.



• Frosted Diffuser

Made of extruded PMMA acrylic with a proprietary frosting technique. The frosted diffuser is intended to be used in Direct or Indirect lighting distributions to ensure the desired halo lighting effect.



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 4/27/20