
HOOLATM SUSPENSION

TYPE:

PROJECT NAME:

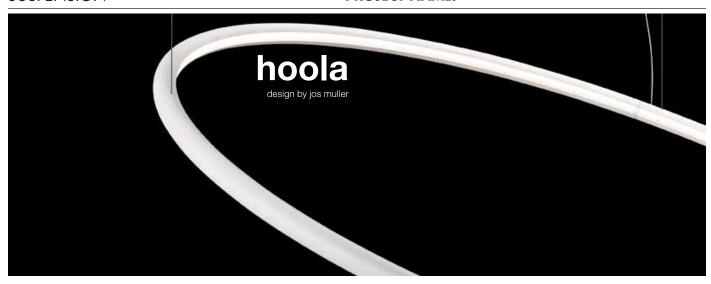

With its very light and minimal design hoola creates an archetypical light circle. The soft light is directed upwards and downwards while its highly efficient led-light curves along with the lamp shape. Hoola is available in 60, 100 and 140cm diameter. Hoola will be a real eyecatcher when different diameters are combined. It can be arranged in horizontal, angled or even vertical positions. The lamps can be place close to a ceiling, in free open spaces or vertically along the wall.

hoola 60 dim



lamp type	LED
colour temp.	2400K / 2700K / 3000K
max. watt	36W
voltage	120V
lumen	2120
class	1
gear	incorporated (dimmable)
diameter	600 mm (23.62")
height	25 (max 2500) mm (0.98")

white T92H3DWLD black T92H3DZLD order code 2700K white T92H9DWLD


black T92H9DZLD

black T92H1DZLD

order code 3000K white T92H1DWLD

order code 2400K

hoola 100 dim



lamp type	LED
colour temp.	2400K / 2700K / 3000K
max. watt	60W
voltage	120V
lumen	3540
class	1
gear	incorporated (dimmable)
diameter	1000 mm (39.37")
height	25 (max 2500) mm (0.98")


black	T92H4DZLD	
order code 2	2700K	
white	T92H10DWLD	
	T92H10DZLD	

white T92H4DWLD

order code 2400K

order code 3	order code 3000K			
white	T92H2DWLD			
black	T92H2DZLD			

hoola 140 dim



type LED	lamp type
emp. 2400K / 2700K / 3000K	colour temp.
watt 90W	max. watt
tage 120V	voltage
men 4950	lumen
lass 1	class
gear incorporated (dimmable)	gear
neter 1400 mm (55.11")	diameter
eight 25 (max 2500) mm (0.98"	height

white	T92H17DWLD	
black	T92H17DZLD	
order code 2	2700K	
	2700K T92H14DWLD	

white T92H13DWLD

black T92H13DZLD

order code 3000K

ORDERING INFO	_	_	_
Model (Order Code)	Finish	LED	Voltage/Dimming
	○ White	○ 2400K	 120V Phase Dimming (Integral Driver)
	○ Black	○ 2700K	 120V 0-10V Dimming (Remote Driver)
		○ 3000K	O 277V 0-10V Dimming (Remote Driver)

LEDOLOGY®

SHEET

ECIFICATION