

METRO™ PLUS

RECESSED

TYPE:


PROJECT NAME:



RECESSED

Metro Plus combines the functions of general and spot lighting. The line module applied in these products, covered by a prism diffuser screen, diffuses light at the angle of 60° while ensuring maximum glare reduction. The glass lens allows adjusting the lighting angle in the range of 15° to 50°. This universal solution guarantees optimal lighting for surfaces while making it possible to frame selected elements of décor or parts of the interior.

General, complementary, and spot lighting. It will work perfectly at establishments such as clubs, galleries, and hotels, but also as lighting for the office and home.

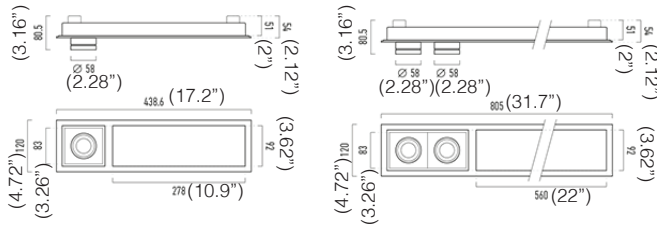

ORDERING INFO

Model	Finish	Output	LED	Voltage	Dimming
<input type="radio"/> L3837.3106 (1 spotlight)	<i>See below</i>	<input type="radio"/> LED 12.8W	<input type="radio"/> 27K (2700K)	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
<input type="radio"/> L3837.3107 (2 spotlights)		+ 12.6W	<input type="radio"/> 30K (3000K)	<input type="radio"/> 277V	<input type="radio"/> 010V (0-10V)
		<input type="radio"/> SLED 12.3W	<input type="radio"/> 40K (4000K)		
		+ 12.6W			

FINISH OPTIONS



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 12/16/19