

PIX™

RECESSED DISPLAY LED

TYPE:

PROJECT NAME:

L676322 Round

0.013 lb



.01 .32




Source LED cod. OPTIC degree LED color

/WW /11 /25 /45 Led max 2W 500 mA 199lm 3000K

/W /11 /25 /45 Led max 2W 500 mA 209lm 4000K

/XW /11 /25 /45 Led max 2W 500 mA 189lm 4000K

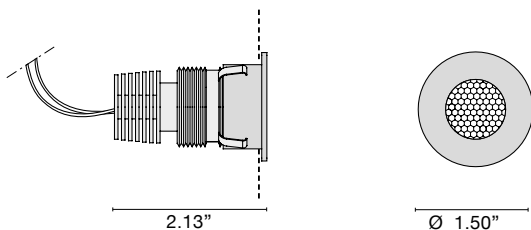


L676323 Square

0.013 lb



.01 .32




Source LED cod. OPTIC degree LED color

/WW /11 /25 /45 Led max 2W 500 mA 199lm 3000K

/W /11 /25 /45 Led max 2W 500 mA 209lm 4000K

/XW /11 /25 /45 Led max 2W 500 mA 189lm 4000K

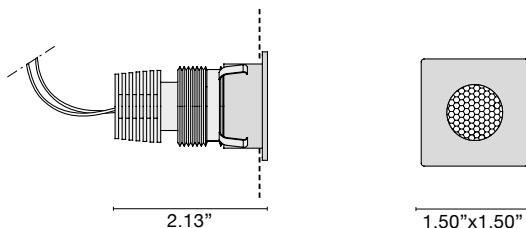


Recessed spotlight in nickel matte finish or white painted. Heatsink included. Available in round or square version. Installation with or without junction box and on metal false ceiling with adapter.

FINISHES

- .01 White
- .32 Matte Nickel

Accessories



L670234
Plastic Box



L670209
Adapter

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	Optic	LED	Remote Driver Options (500mA 12W)
	<input type="radio"/> .01 White	<input type="radio"/> 11°	<input type="radio"/> 3000K	<input type="radio"/> 120V On/Off (Min 1 Max 6 Fixtures)
	<input type="radio"/> .32 Matte Nickel	<input type="radio"/> 25°	<input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming (Min 3 Max 6 Fixtures)
		<input type="radio"/> 45°		<input type="radio"/> 120V 0-10V Dimming (Min 3 Max 6 Fixtures)
				<input type="radio"/> 277V 0-10V Dimming (Min 3 Max 6 Fixtures)



LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 05/07/21