


ROMEO™

CEILING MOUNT

TYPE:


PROJECT NAME:

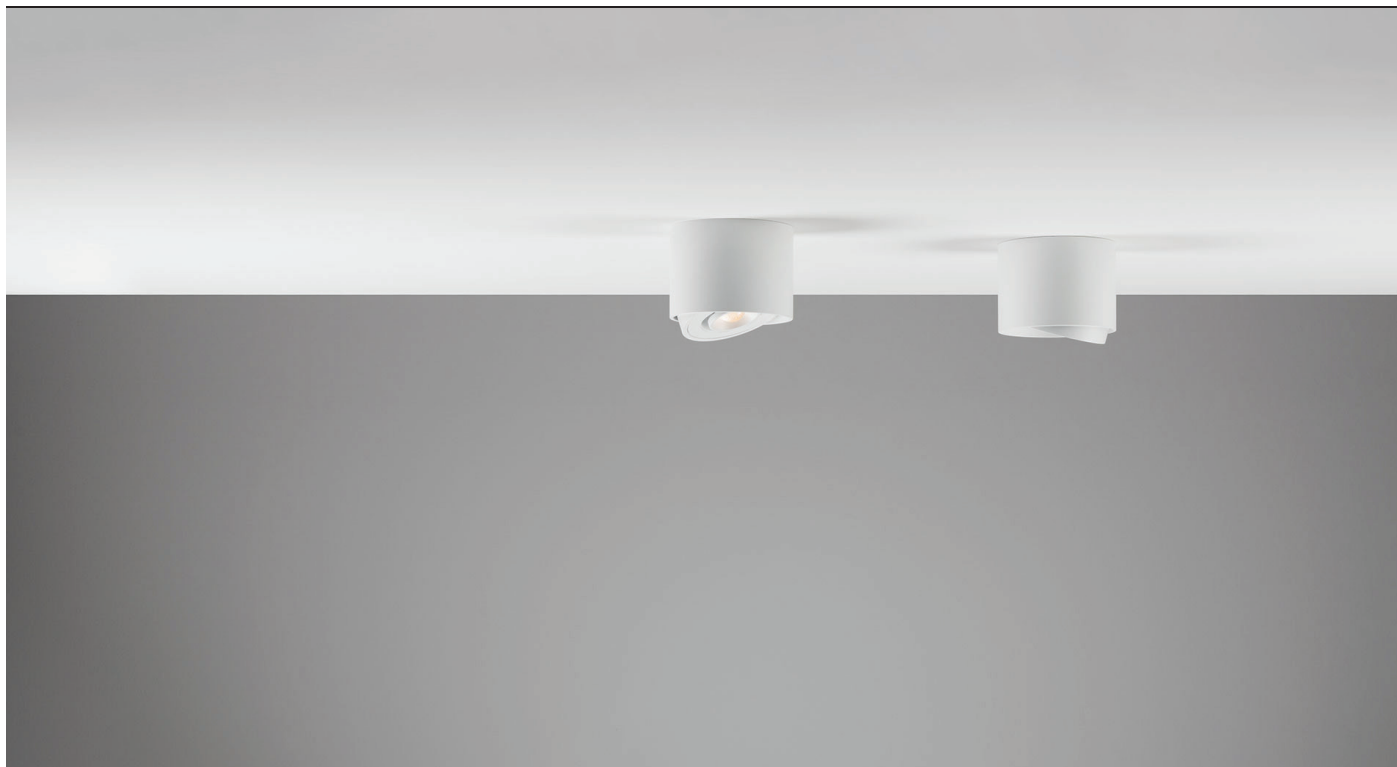

SURFACE MOUNTED

These light fittings, featuring a simple and minimalist design and precise workmanship as well as no visible installation screws, offer a possibility of using various light sources. The client can choose either the version supporting halogen lights or LED substitutes, or the one expanded by a Lightpro module, which becomes an integral part of the light - ensuring adjustable lighting angle in the range of 15° to 50°.

General, complementary, and spot lighting. The luminaires will work perfectly at establishments such as clubs, galleries, and hotels, but also as lighting for the office and home.

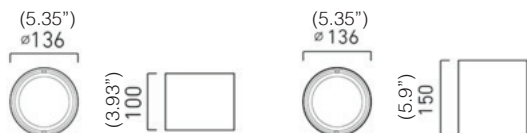

ORDERING INFO

Model	Finish	Output	LED	Voltage	Dimming
<input type="radio"/> L3817.1101 (height: 100mm)	<i>See below</i>	<input type="radio"/> Halo. 20-50W	<input type="radio"/> 27K (2700K)	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
<input type="radio"/> L3817.1102 (height: 150mm)		<input type="radio"/> LED 12.8W	<input type="radio"/> 30K (3000K)	<input type="radio"/> 277V	<input type="radio"/> 010V (0-10V)
		<input type="radio"/> SLED 12.3W	<input type="radio"/> 40K (4000K)		

FINISH OPTIONS



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 12/16/19