

# ROY™

CEILING MOUNTED

TYPE:


PROJECT NAME:



Roy is a series of simple lights featuring an efficient 6 W LED source (output equivalent to that of a 50 halogen bulb). The luminaire's increased tightness (IP65) and low-voltage power supply unit make it perfect for applications in interiors with high humidity levels. In other interiors, they can serve as subtle-looking plafonds.

	INDEX	SOURCE / OUTPUT	LUMINOUS FLUX	ANGLE	LIGHT COLOUR
	ROY ROUND 2700	L3801.1102.A16. LED 6 W	428 lm	>90°	2700 K CRI≥95
	ROY ROUND 3000	L3801.1102.A17. LED 6 W	474 lm	>90°	3000 K CRI≥95
	ROY ROUND 4000	L3801.1102.A18. LED 6 W	543 lm	>90°	4000 K CRI≥95
	ROY ROUND+ 2700	L3801.1102.71A. LED 6.5 W	411 lm	>90°	2700 K CRI≥97
	ROY ROUND+ 3000	L3801.1102.71B. LED 6.5 W	423 lm	>90°	3000 K CRI≥97
	ROY ROUND+ 4000	L3801.1102.71C. LED 6.5 W	459 lm	>90°	4000 K CRI≥97
	ROY SQUARE 2700	L3801.1103.A16. LED 6 W	428 lm	60°	2700 K CRI≥95
	ROY SQUARE 3000	L3801.1103.A17. LED 6 W	474 lm	60°	3000 K CRI≥95
	ROY SQUARE 4000	L3801.1103.A18. LED 6 W	543 lm	60°	4000 K CRI≥95
	ROY SQUARE+ 2700	L3801.1103.71A. LED 6.5 W	411 lm	60°	2700 K CRI≥97
	ROY SQUARE+ 3000	L3801.1103.71B. LED 6.5 W	423 lm	60°	3000 K CRI≥97
	ROY SQUARE+ 4000	L3801.1103.71C. LED 6.5 W	459 lm	60°	4000 K CRI≥97

Finish Options

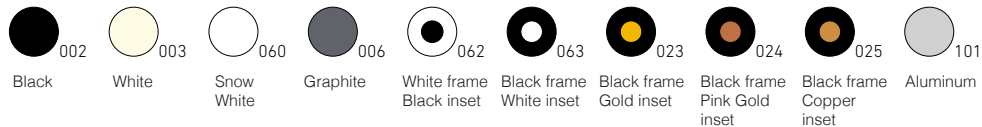

ORDERING INFO

Model (Order Code)	Finish	LED	Driver Options
-	See above	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



SPECIFICATION SHEET

LEDOLOGY®

A Luminart® BRAND

WWW.LEDOLOGY.COM  
Last updated: 6/10/21