

SPOON™

RECESSED

TYPE:

PROJECT NAME:




L676350

0.22 lb


/WW Led max 2W 500 mA 199lm 3000K

/W Led max 2W 500 mA 209lm 4000K

/XW Led max 2W 500 mA 189lm 2700K

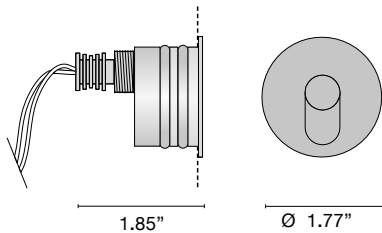

.01/WW .01/W .45/WW .45/W
.01/XW .45/XW




L676351

0.22 lb


/WW Led max 2W 500 mA 199lm 3000K

/W Led max 2W 500 mA 209lm 4000K

/XW Led max 2W 500 mA 189lm 2700K

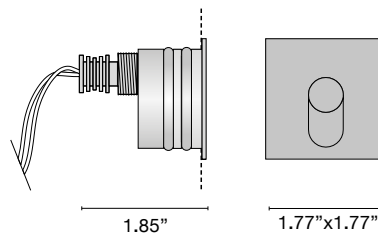

.01/WW .01/W .45/WW .45/W
.01/XW .45/XW



Recessed spotlight for asymmetric emission. Aluminum frame in anodized or white finish. Heat sink included. Mounting with junction box.

FINISHES

- .01 White
- .45 Anodized Aluminum

Accessories



L670217
Plastic Box

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	LED	Remote Driver Options (500mA 12W)
	<input type="radio"/> .01 White	<input type="radio"/> 2700K	<input type="radio"/> 120V On/Off (Min 1 Max 6 Fixtures)
	<input type="radio"/> .45 Anodized Aluminum	<input type="radio"/> 3000K	<input type="radio"/> 120V Phase Dimming (Min 3 Max 6 Fixtures)
		<input type="radio"/> 4000K	<input type="radio"/> 120V 0-10V Dimming (Min 3 Max 6 Fixtures)
			<input type="radio"/> 277V 0-10V Dimming (Min 3 Max 6 Fixtures)



LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM

Last updated: 05/07/21