

VISION™ 3

SPOTLIGHT

TYPE:

PROJECT NAME:



L674511

1.54 lb




.45

Series of adjustable outdoor projectors in anodized aluminum (reinforced anodizing for outdoor) with bracket in stainless steel AISI 316L. Supplied with neoprene cable. To be installed on tile, pavement, wall, ceiling or temporary positioning on soft grounds.

Source LED	OPTIC degree		lm	LED color
<i>/WW</i>	<i>/10 /25 /40</i>	3x2W 500mA	597lm	3000K
<i>/W</i>	<i>/10 /25 /40</i>	3x2W 500mA	627lm	4000K

FINISHES

.45 Anodized Aluminum

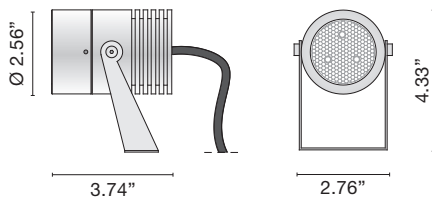

Accessories



L670248
Stake



L670243
IP Connector

ORDERING INFO

Model (Order Code)	Finish	Optic	LED	Remote Driver Options (500mA)
	<input type="radio"/> .45 Anodized Aluminum	<input type="radio"/> 10° <input type="radio"/> 25° <input type="radio"/> 40°	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V On/Off (12W, Min 1 Max 2 Fixtures) <input type="radio"/> 120V Phase Dimming (25W, Min 2 Max 4) <input type="radio"/> 120V 0-10V Dimming (25W, Min 2 Max 4) <input type="radio"/> 277V 0-10V Dimming (25W, Min 2 Max 4)



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 05/25/21