

Z SERIES™ 25 PLUS

RECESSED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	LED	Voltage	Dimming
	<input type="radio"/> Matte Steel	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V <input type="radio"/> 277V	<input type="radio"/> LTE (Leading/Trailing Edge Dim) <input type="radio"/> 010V (0-10V)



Please note: 277V is only compatible with 0-10V dimming

LEDOLOGY®

A **Luminart** BRAND


WWW.LEDOLOGY.COM
Last updated: 07/02/20

Z SERIES™ 25 PLUS

RECESSED

TYPE:

PROJECT NAME:

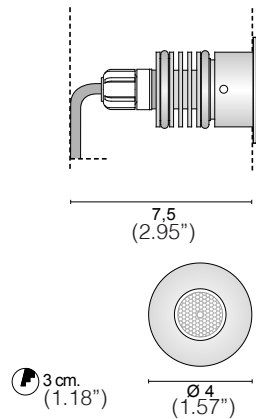


L676384 Z Series Round 25 Plus

.33 Matte steel
AISI 316L Stainless Steel

Color temperature	Optics	Light sources	lm
<i>/W</i> 4000K	<i>/11 /25 /45</i>	LED max 2W 500mA	209lm
<i>/WW</i> 3000K	<i>/11 /25 /45</i>	LED max 2W 500mA	199lm
<i>/XW</i> 2700K	<i>/11 /25 /45</i>	LED max 2W 500mA	189lm



0,08 Kg

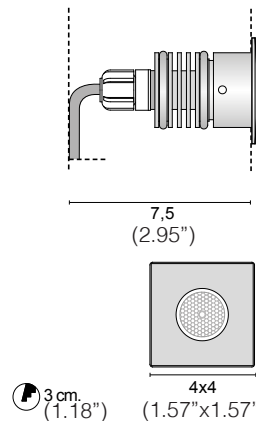

L676394 Z Series Square 25 Plus

.33 Matte steel
AISI 316L Stainless Steel

Color temperature	Optics	Light sources	lm
<i>/W</i> 4000K	<i>/11 /25 /45</i>	LED max 2W 500mA	209lm
<i>/WW</i> 3000K	<i>/11 /25 /45</i>	LED max 2W 500mA	199lm
<i>/XW</i> 2700K	<i>/11 /25 /45</i>	LED max 2W 500mA	189lm



0,10 Kg

Accessories



L670216
Plastic box



L670220
KIT: draining junction + IP connector

SPECIFICATION SHEET

Code	Drivers ON/OFF			IP67 drivers		DIMMABLE drivers			
	0125 350mA	0128 350mA	0127 500mA	0031/IP 350mA	0143/IP 500mA	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145/DALI DIM DALI	0145 DIM
L676384	1-6	1-10	1-6	1-10	1-7	1-12	1-12	1-21	1-21
L676394	1-6	1-10	1-6	1-10	1-7	1-12	1-12	1-21	1-21

Only serial connection

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM
Last updated: 07/02/20